


2025

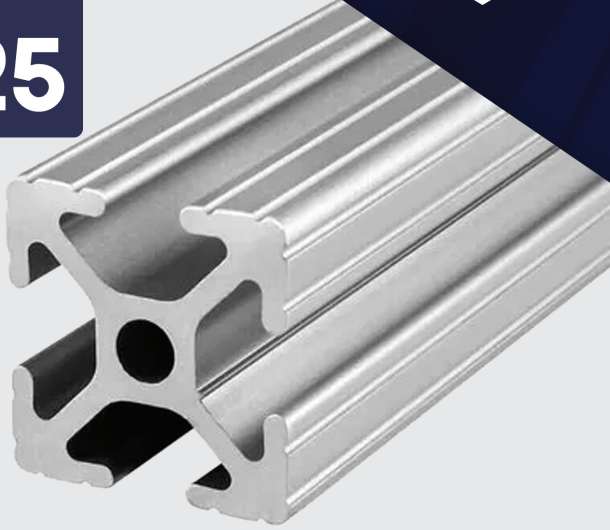

كتالوج المقاطع الألومنيومية الصناعية


Industrial Aluminum Profiles Catalog

الأفضل الدولي للخليج

شركة متخصصة في إنتاج جميع أنواع مقاطع الألومنيوم للأبواب والنوافذ وواجهات المباني الحديثة والاستخدامات الصناعية



Aluminum, as one of the most strategic and widely used metals in the world, has earned a remarkable position across various industries thanks to its lightweight nature, exceptional corrosion resistance, full recyclability, and outstanding formability. This valuable material, with its reliable mechanical strength and excellent thermal and electrical conductivity, plays a vital role in the advancement of modern technologies including construction, transportation, energy, household appliances, and the aerospace industry. Aluminum profiles, as one of the key products of this sector, combine aesthetics, functionality, and durability—providing an ideal solution for modern engineering and architectural requirements while opening new horizons for innovation and progress in industrial and building applications.

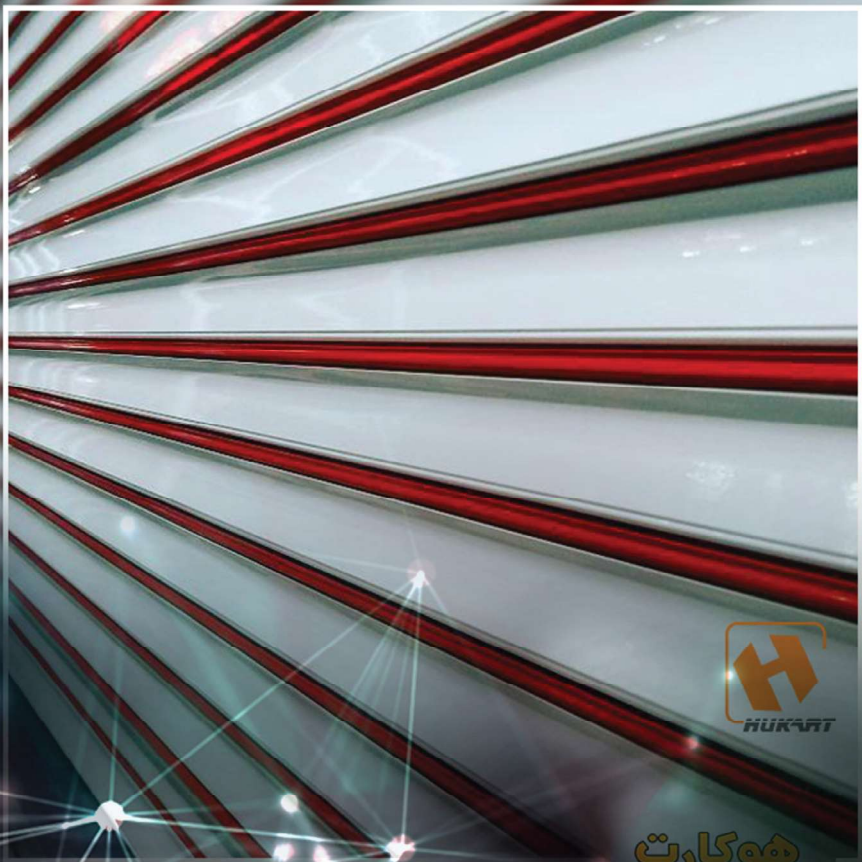

LUX Original

Lux 70



70 mm	blade width
14 mm	Blade thickness
4.5 meters	The highest height
6 meters	maximum width

LUX Original



Extra



110 mm	blade width
15 mm	Blade thickness
8 meters	The highest height
5 meters	maximum width


LUX Original

Lux70 Punch



70 mm	blade width
13 mm	Blade thickness
6 meters	The highest height
4.5 meters	maximum width

LUX Original

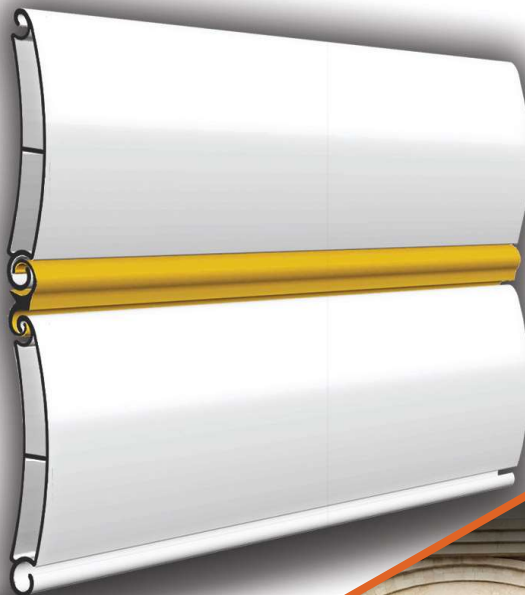

Lux 110

110 mm	blade width
19 mm	Blade thickness
8 meters	The highest height
7 meters	maximum width

LUX Original



Lux 90



LUX Original
Decoral Design

91 mm	blade width
18 mm	Blade thickness
8 meters	The highest height
7 meters	maximum width

LUX Original



Zebker

Curve 80



79 mm	blade width
17 mm	Blade thickness
8 meters	The highest height
6 meters	maximum width



Dopol 80

79 mm	blade width
20 mm	Blade thickness
6 meters	The highest height
8 meters	maximum width


Zebker



Curve 100



101 mm	blade width
22 mm	Blade thickness
8 meters	The highest height
8 meters	maximum width

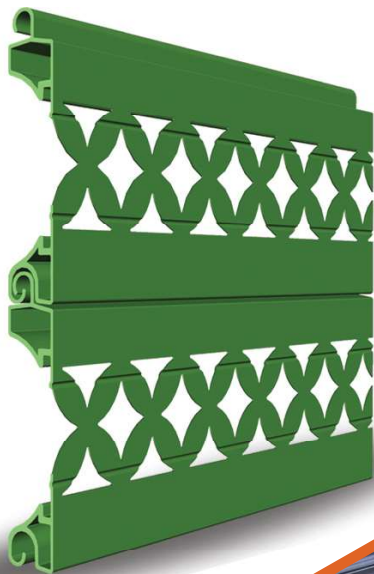

Flower



79 mm	blade width
14 mm	Blade thickness
8 meters	The highest height
6 meters	maximum width

Punch 80



79 mm	blade width
14 mm	Blade thickness
8 meters	The highest height
6 meters	maximum width




Curve 60

58 mm	blade width
15 mm	Blade thickness
7 meters	The highest height
6 meters	maximum width


Zebker



Punch 40

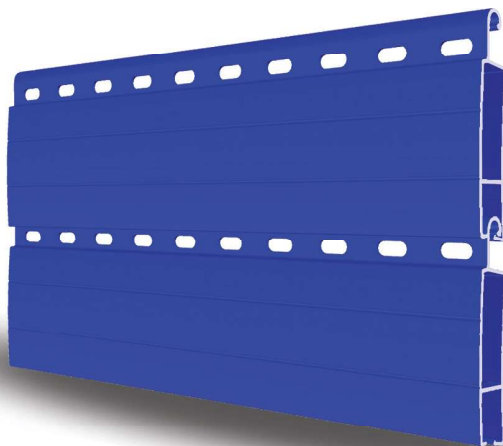

53 mm	blade width
12 mm	Blade thickness
6 meters	The highest height
5 meters	maximum width

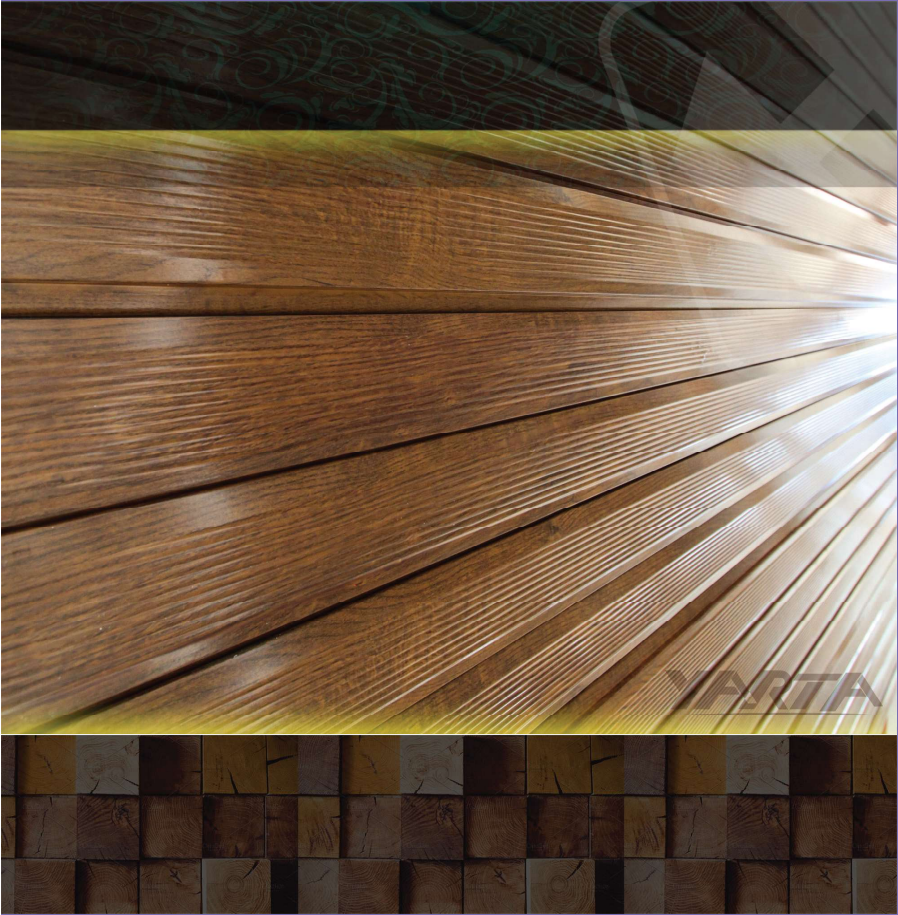


YARTA



HUKART
ALUMINUM PROFILE

Pucker

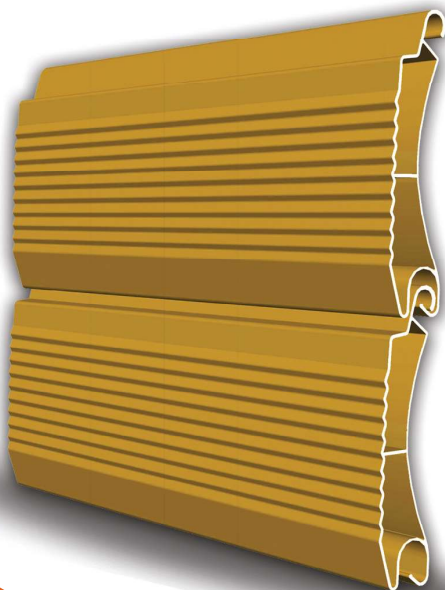

90 mm	blade width
25 mm	Blade thickness
8 meters	The highest height
8 meters	maximum width

YARTA




Crash

80 mm	blade width
20 mm	Blade thickness
8 meters	The highest height
6 meters	maximum width

YARTA



Butterfly

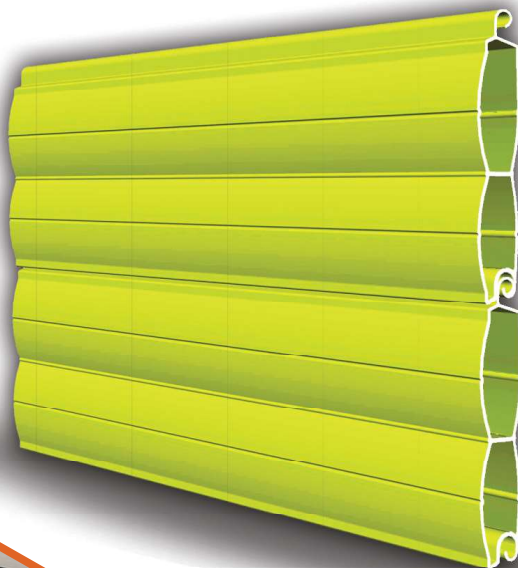

79 mm	blade width
16 mm	Blade thickness
8 meters	Maximum height
6 meters	maximum width

YARTA



Recap 80




79 mm	blade width
17 mm	Blade thickness
8 meters	Maximum height
6 meters	maximum width

YARTA




Adler 40

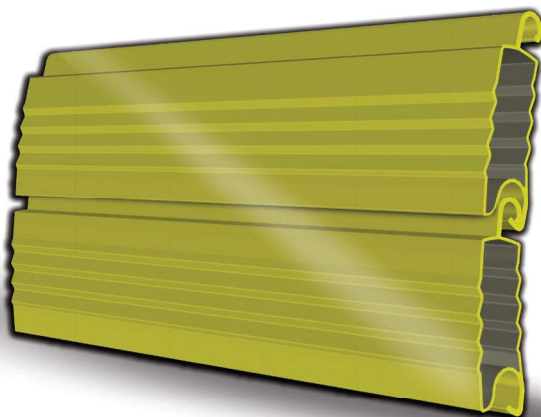

42 mm	blade width
13.5 mm	Blade thickness
5 meters	Maximum height
4.5 meters	maximum width

YARTA

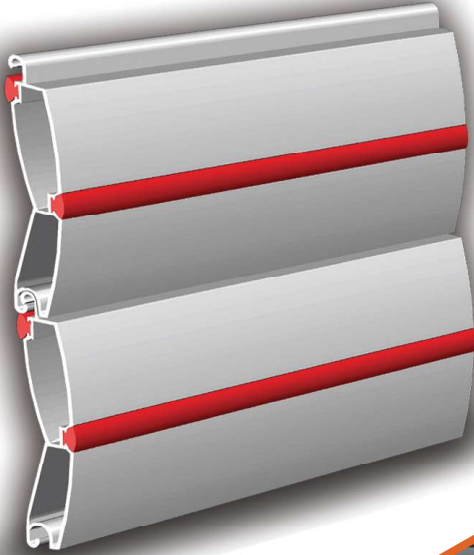

Eleven

83 mm	blade width
18 mm	Blade thickness
7 meters	Maximum height
5.6 meters	maximum width

YARTA




Eleven Punch



82 mm	blade width
18 mm	Blade thickness
7 meters	Maximum height
6 meters	maximum width

YARTA

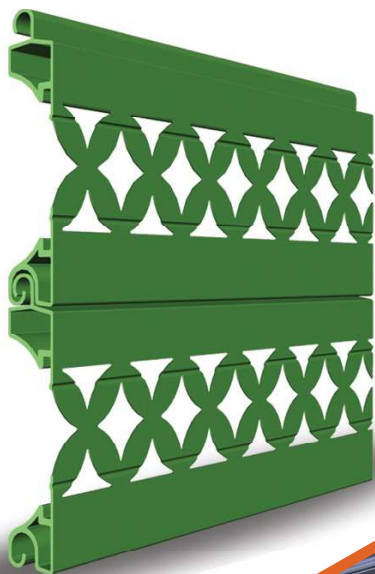

Flower



79 mm	blade width
14 mm	Blade thickness
8 meters	Maximum height
6 meters	maximum width

YARTA

Punch 80



79 mm	blade width
14 mm	Blade thickness
8 meters	Maximum height
6 meters	maximum width

YARTA




New ERNEST

113 mm	blade width
30 mm	Blade thickness
8 meters	Maximum height
12 meters	maximum width

YARTA



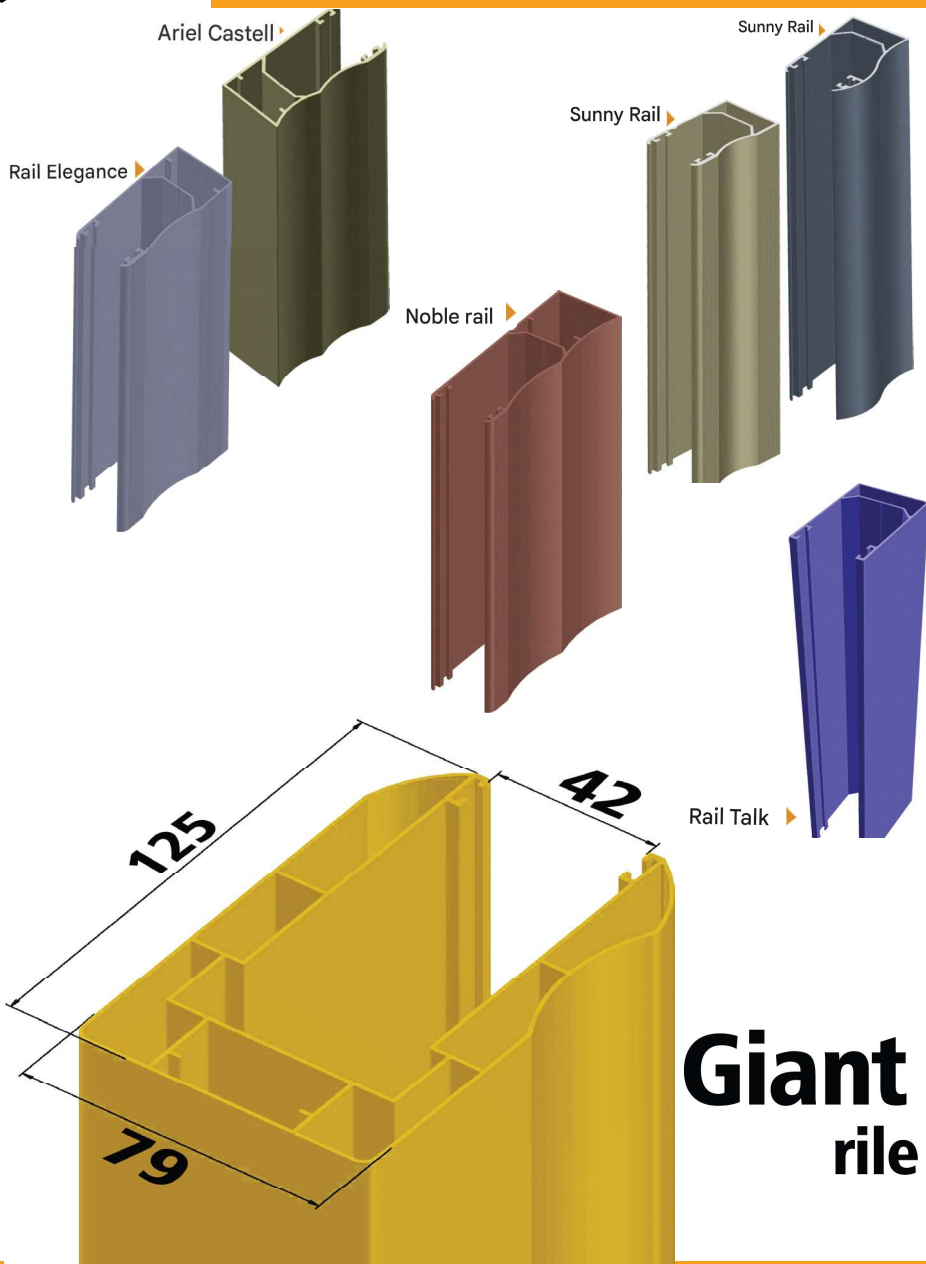




80 mm	blade width
18 mm	Blade thickness
5 meters	Maximum height
6 meters	maximum width



HUKART
ALUMINUM PROFILE

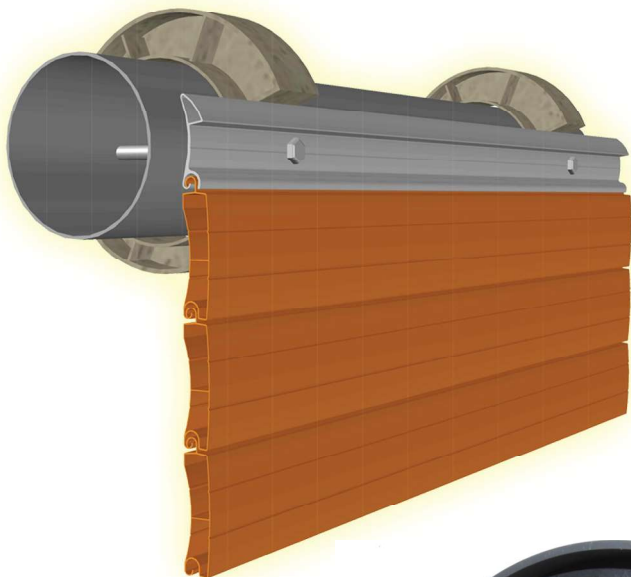



Transparent shutter



Transparent shutter




110 mm	blade width
17 mm	Blade thickness
5 meters	Maximum height
6 meters	maximum width




Aluminium **window and door** systems

A detailed technical cross-section diagram of a window frame assembly. The diagram illustrates the internal structure of the frame, including the glass pane, the surrounding frame material, and the insulation layers. The frame is shown in a grey color, and the glass is a light blue. The insulation is represented by a dark grey layer. The diagram shows the frame from a side perspective, highlighting the depth and the internal components.

[illegible]

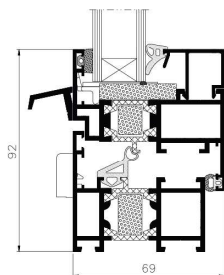


window profile MB-60HI

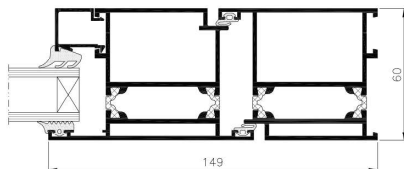


door profile MB-60

MB-60


PT-52

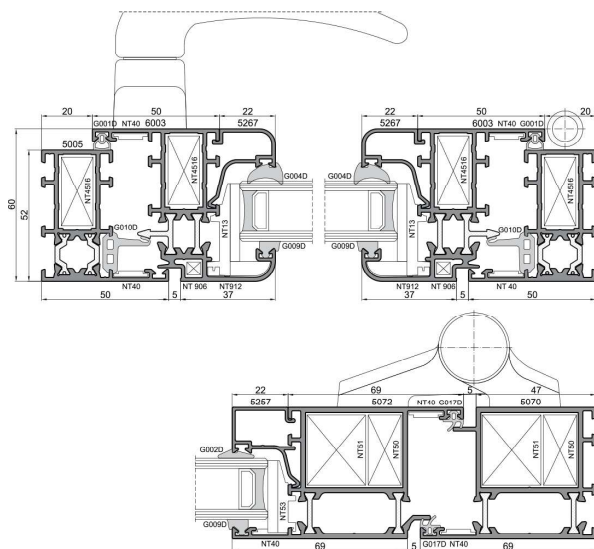

MB-70

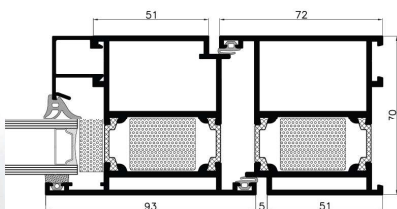

door profile MB-70 HI

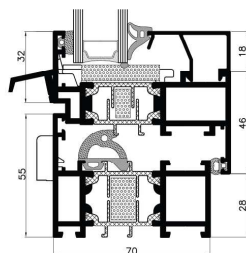

window profile MB-70 HI

MB-86



Window MB-86 ST




Window MB-86 US





Window MB-86 AERO



PE-52


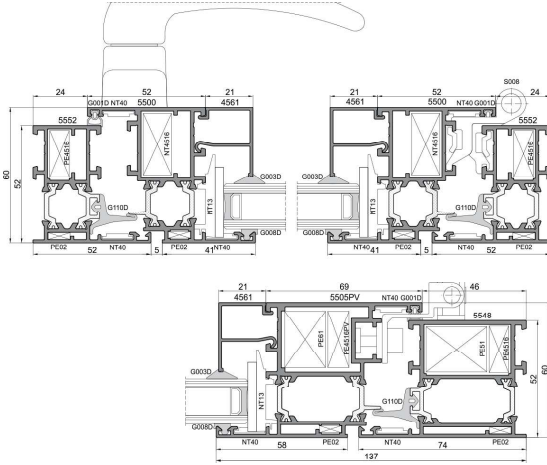


Fireproof doors and profiles

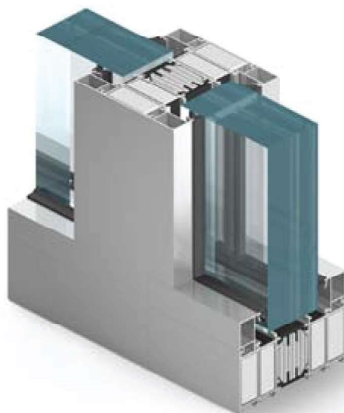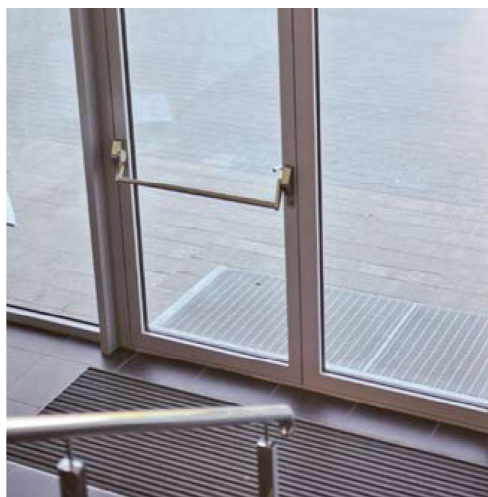




Curtain wall

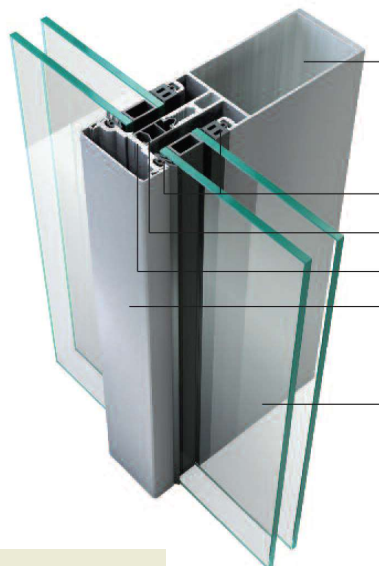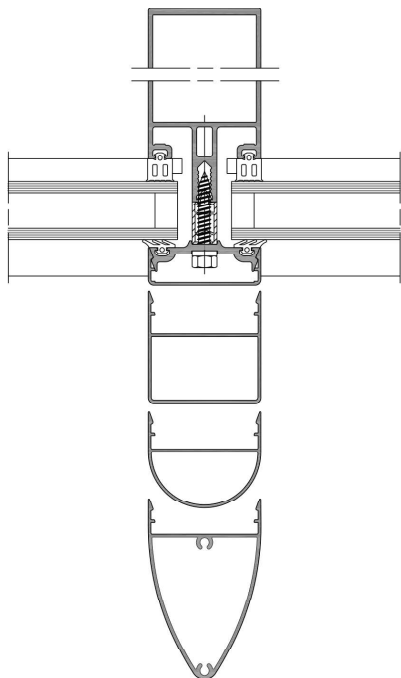


PS -50





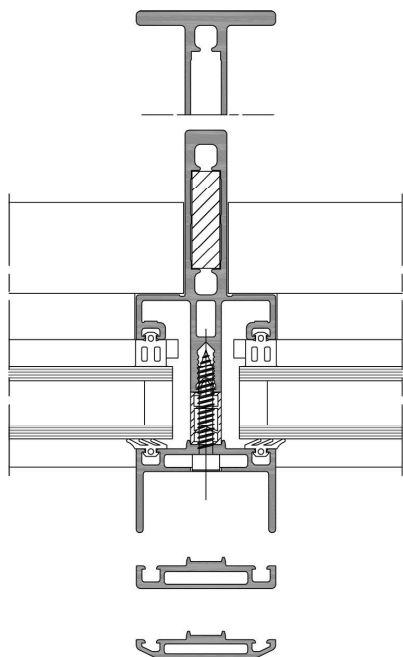





PS -50 I

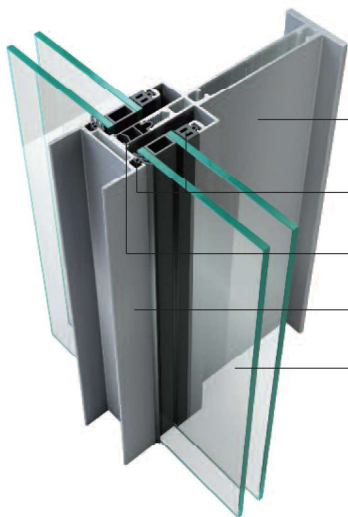


PS -50 S

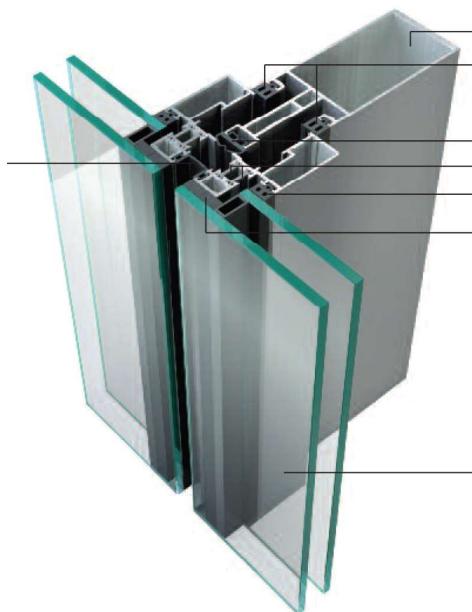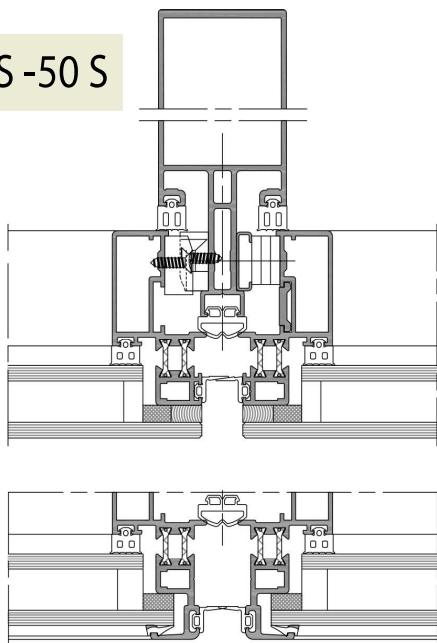



PS -50 W

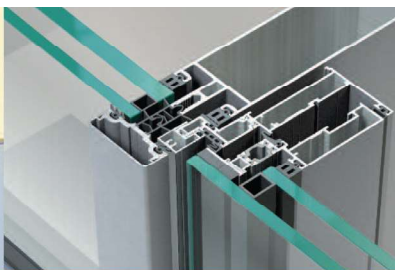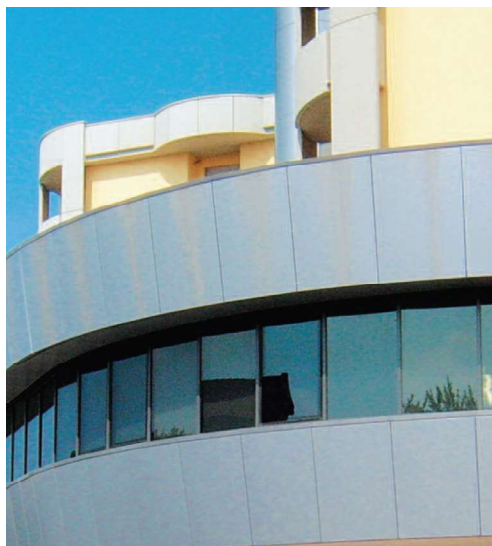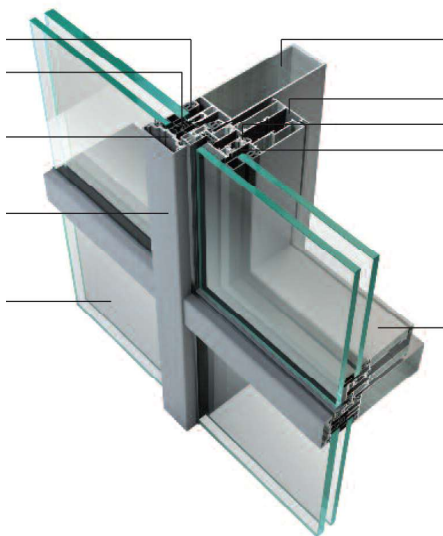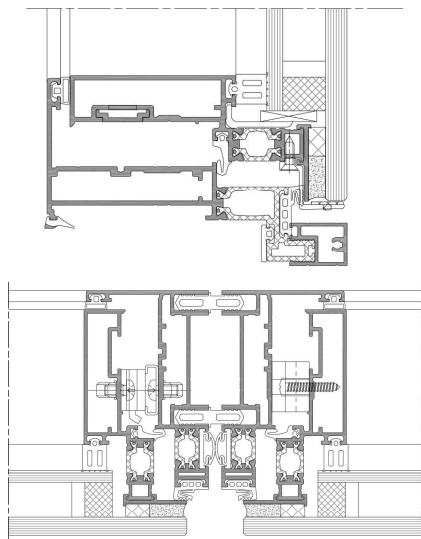

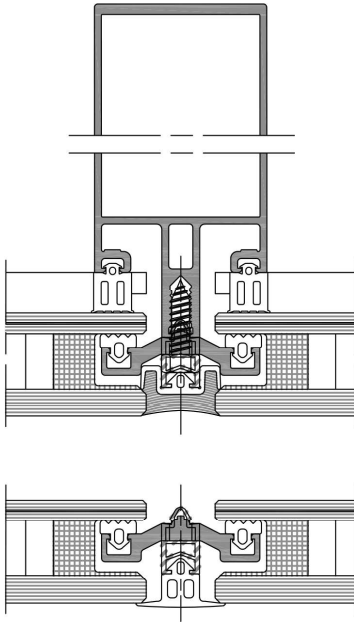


PS -50 CV


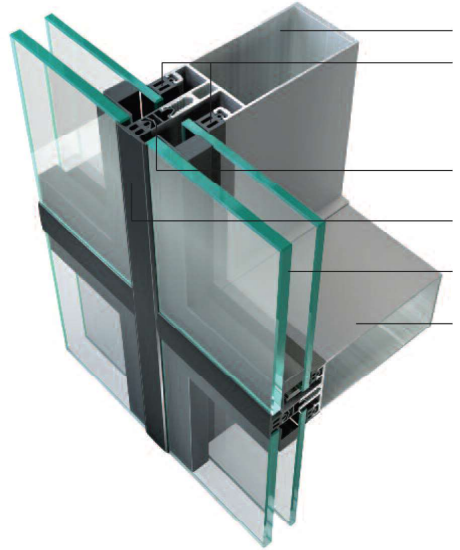



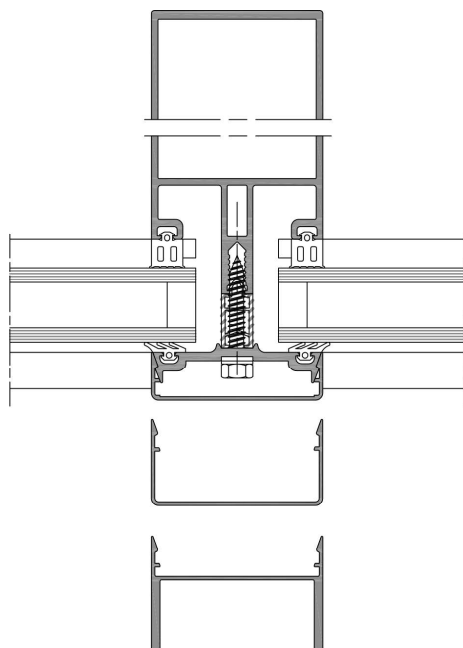


PS -60

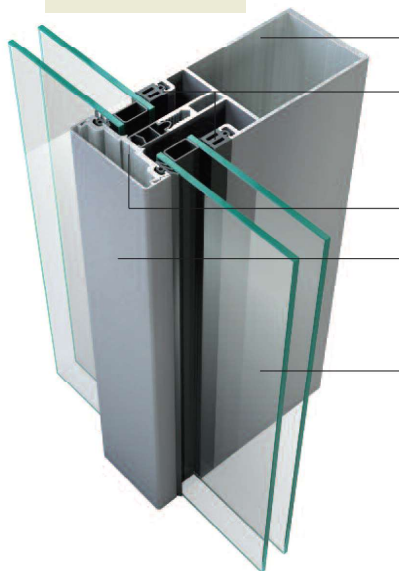


PS -60 CV

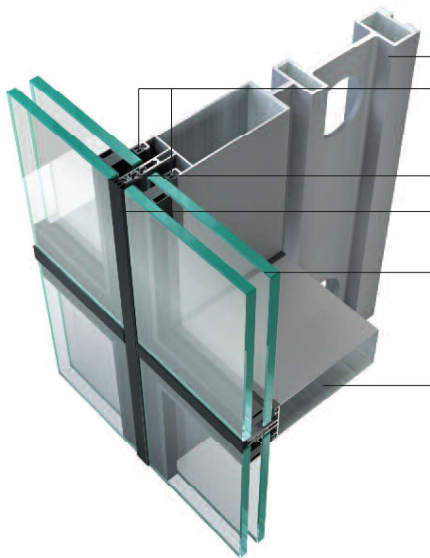
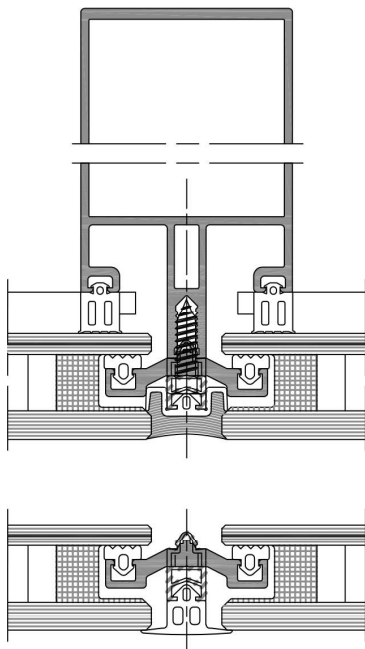


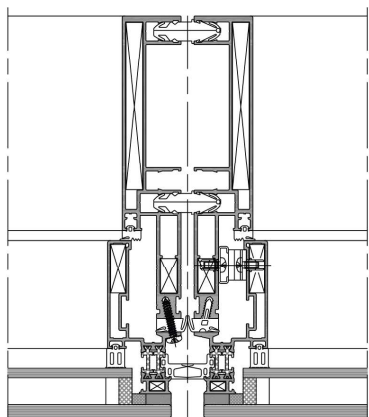



PS -80 Fast

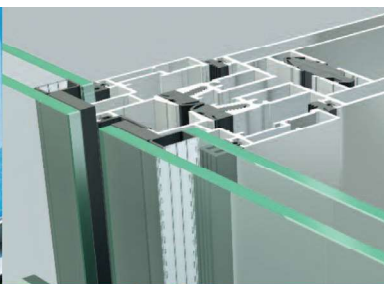


PSG -130

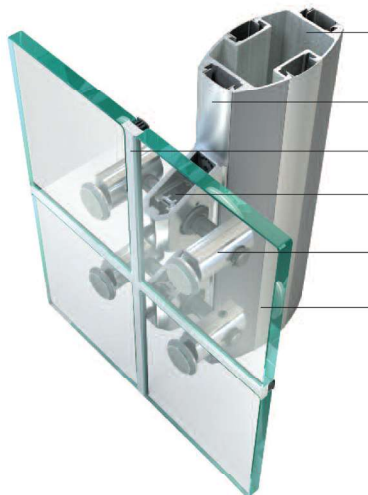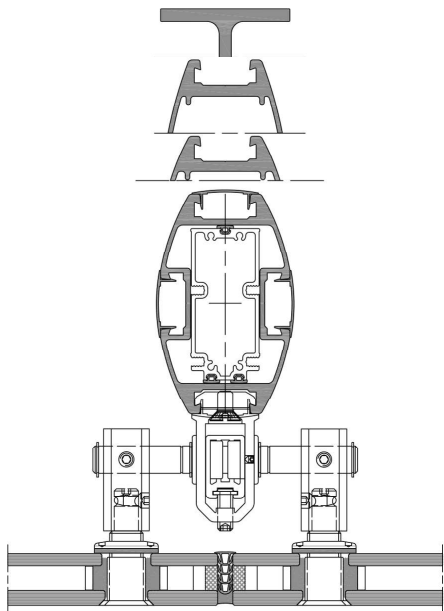


PSG -180

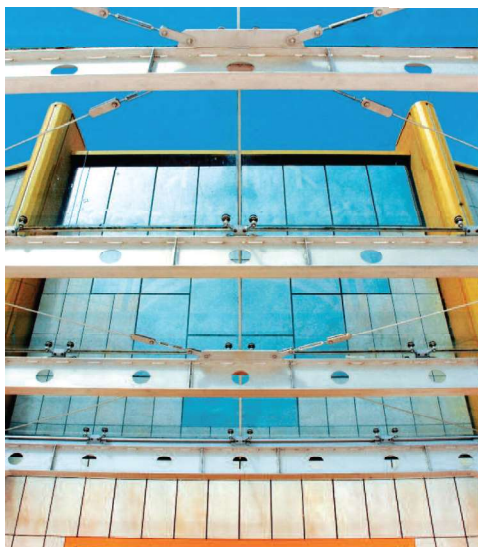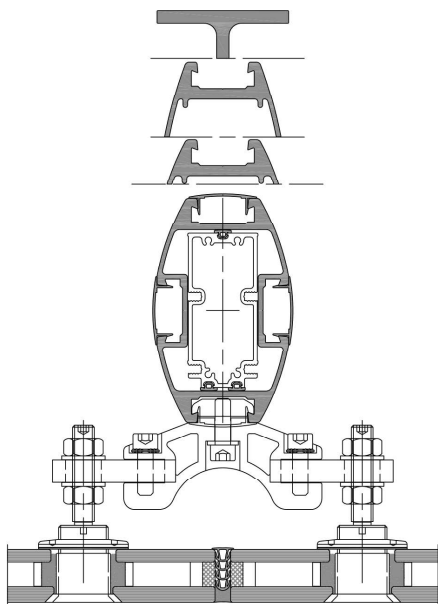

PSG - 150

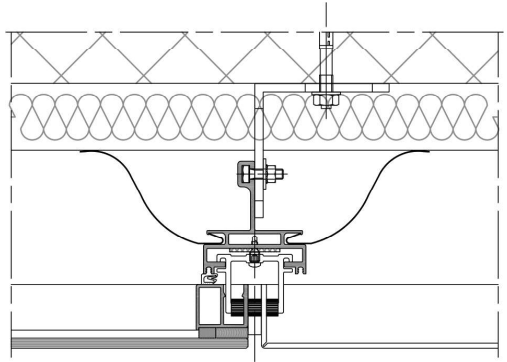

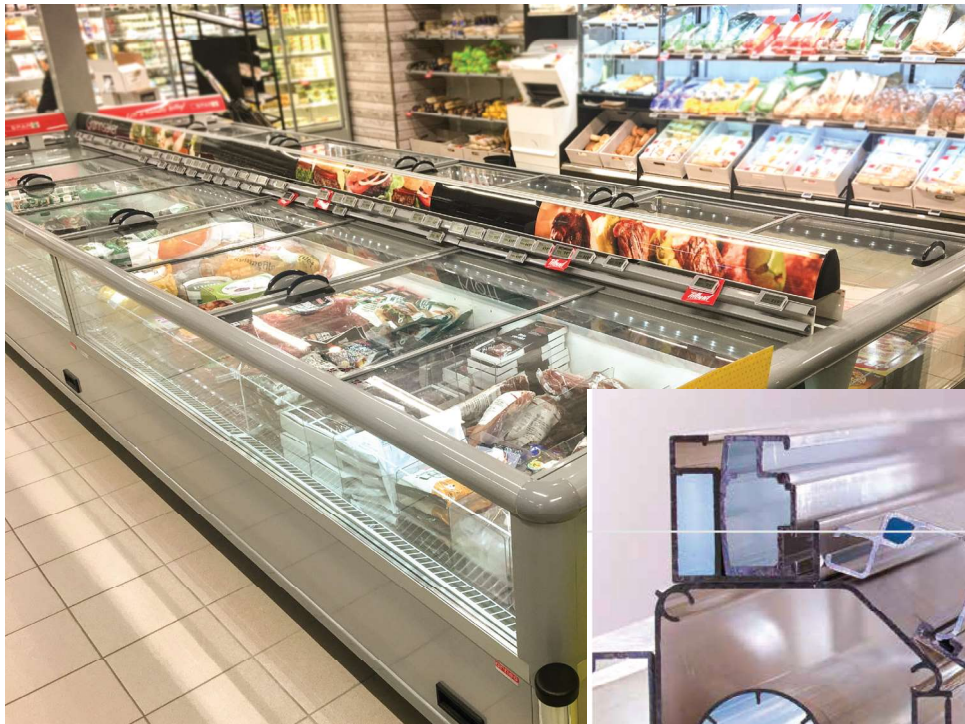

refrigerator aluminum profile

A42126


Aluminum profile, diameter
25mm, thickness 1.5mm

Weight: 0.300 kg /m

Delivery condition: in stock

Finish: silver anodized

Note: Profile for handle
F31111AA,F31111AB,F31111
AC




A42130

Round aluminum tube

Weight m /l: 0.470 Kg

Delivery condition: Available
upon request. Delivery to be
agreed upon.




A40713

Aluminum profile MP24

Weight m /l: 0.606 Kg

Delivery condition: Available
upon request. Delivery to be
agreed upon.




A40710

Aluminum profile MP20

Weight m /l: 0.589 Kg

Delivery condition: In stock




A40709

Aluminum profile MP19

Weight m /l: 0.456 Kg

Delivery condition: In stock





A40707

Aluminum profile MP17

Weight m /l: 0.831 Kg

Delivery condition: In stock

Note: to be always combined with seal code F50150 or F50652




A40703

Aluminum profile MP14

Weight m /l: 0.714 Kg

Delivery condition: In stock




A40702

Aluminum profile MP13

Weight m /l: 0.577 Kg

Delivery condition: Available upon request. Delivery to be agreed upon.




A40721

Aluminum profile MP33

Weight m /l: 0.793 Kg

Delivery condition: In stock

Note: for 4 to 5 mm thick sheets,
it can be replaced with profile
without seal MP46 code
A40821




A40715

Aluminum profile MP26

Weight m /l: 0.679 Kg

Delivery condition: In stock

Note: for 4 to 5 mm thick sheets,
it can be replaced with profile
without seal MP43 code
A40815




A40708

Aluminium profile MP18

Weight m /l: 0.785 Kg

Delivery condition: In stock

Note: for 4 to 5 mm thick sheets,
it can be replaced with profile
without seal MP42 code
A40808




A40701

Aluminum profile MP12

Weight m /l: 0.618 Kg

Delivery condition: In stock

Note: for 4 to 5 mm thick sheets,
it can be replaced with profile
without seal MP40 code
A40801



A40828

Aluminum profile MP88 for


corner without seal

Sheet: th. 4 mm

Weight: 0.979 kg /m

Delivery condition: In stock

Note: for 4 mm thick material,
only



A40827

Aluminum profile MP87 for



doors with leaf without seal

Sheet: th. 4 mm

Weight: 0.921 kg /m

Delivery condition: in stock

Note: for 4 mm thick sheet, only



A40824

Aluminum profile MP83 for door
separation without seal

Sheet: th.4mm

Weight: 0.958 Kg /m

Delivery condition: In stock

Note: for 4 mm thick material,
only



A40823



Aluminum profile MP82 for door
without seal

Sheet th. 4mm

Weight 0.724 Kg /mt

Delivery condition: In stock

Note: for 4 mm thick material,
only




A40821

Aluminum profile MP46

Weight m /l: 0.891 Kg

Delivery condition: In stock




A40815

Aluminum profile MP43

Weight m /l: 0.943 Kg

Delivery condition: In stock



A40808

Aluminum profile MP42

Weight m /l: 0.966 Kg

Delivery condition: In stock




A40801

Aluminum profile MP40

Weight m /l: 0.724 Kg

Delivery condition: In stock



A40825



Aluminum profile MP85 for
frame without seal

Sheet: th. 4mm

Weight: 0.854 Kg /m

Delivery condition: In stock

Note: for 4mm thick material,
only




A40820

Aluminum profile MP45

Weight: 1.032 Kg /mt

Delivery condition: In stock





A40816

Aluminum profile MP44

Weight: 1.087 Kg /mt

Delivery condition: In stock





A40806

Aluminum profile MP41

Weight: 0.831 Kg /mt

Delivery condition: In stock




A40730

Aluminum profile MP60 for
double sliding door with
symmetrical guide

Weight: 1.331 Kg /m

Delivery condition: In stock





A40724

Aluminum profile MP36

Weight: 1.500 Kg /m

Delivery condition: In stock




A40723

Aluminum profile MP35

Weight: 1.054 Kg /m

Delivery condition: In stock




A40704

Aluminum profile MP15

Weight: 0.788 Kg /m

Delivery condition: In stock



A40826


Aluminum profile MP86 for
sliding door without seal

Sheet: th. 4 mm

Weight: 0.800 kg /m

Delivery condition: In stock

Note: for 4 mm thick material,
only




A40822

Aluminum profile MP59

Weight: 0.873 Kg /m

Delivery condition: In stock




A40767

Aluminum profile MP76 for
standard sliding door with one
guide

Weight: 0.703 kg /m

Delivery condition: Available
upon request. Delivery to be
agreed upon.




A40731

Aluminum profile MP61 for three
-panel sliding door with
symmetrical guide

Weight: 1.866 Kg /m

Delivery condition: In stock




A40712

Aluminum profile MP22

Weight: 0.261 Kg /m

Delivery condition: Available upon request. Delivery to be agreed upon.




A40711

Aluminum profile MP21

Weight: 0.224 Kg /m

Delivery condition: Available upon request. Delivery to be agreed upon.




A40833

Moulding for profile without seal
Q30

Sheet: th. 5 mm

Weight: 0.392 kg /m

Delivery condition: Available upon request. Delivery to be agreed upon.




A40832

Moulding for profile without seal
Q25

Sheet: th. 5 mm

Weight: 0.336 kg /m

Delivery condition: Available upon request. Delivery to be agreed upon.



A40831

Moulding for profile without seal


Q30

Sheet: th. 4 mm

Weight: 0.406 kg /m

Delivery condition: In stock

Note: for 4 mm thick material,
only



A40830

Moulding for profile without seal


Q25

Sheet: th. 4 mm

Weight: 0.354 kg /m

Delivery condition: In stock

Note: for 4 mm thick material,
only




A40778

Aluminum profile MP98 -
Aluminium profile used by
handle

Weight: 1 053 Kg

Finished: anodization

Delivery condition: In stock



A40777



Aluminum profile MP97

Weight in lb. 1,496 Kg /MU

Finished: anodization

Delivery condition: In stock

Note: Used for door with only plastic materials thickness between 8 to 12mm




A40770B

Aluminum profile MP79

Weight: 1.542 kg /m

Delivery condition: Available upon request. Delivery to be agreed upon.

Utilization: The profile is made for vertical and horizontal door with only plastic materials 15 mm thickness. Is indicated for pharmaceutical application. It guarantee a wonderful estetical result but need a mecanical solution for the movement.





A40769

Aluminum profile MP78 for sliding frame with double dovetail guide

Weight: 1.925 kg /m

Delivery condition: In stock





A40768

Aluminum profile MP77 for sliding frame with single dovetail guide

Weight: 0.986 kg /m

Delivery condition: In stock





A40766

Aluminum profile MP75, dovetail guide.

Weight: 0.456 kg /m


Delivery condition: Available upon request. Delivery to be agreed upon.



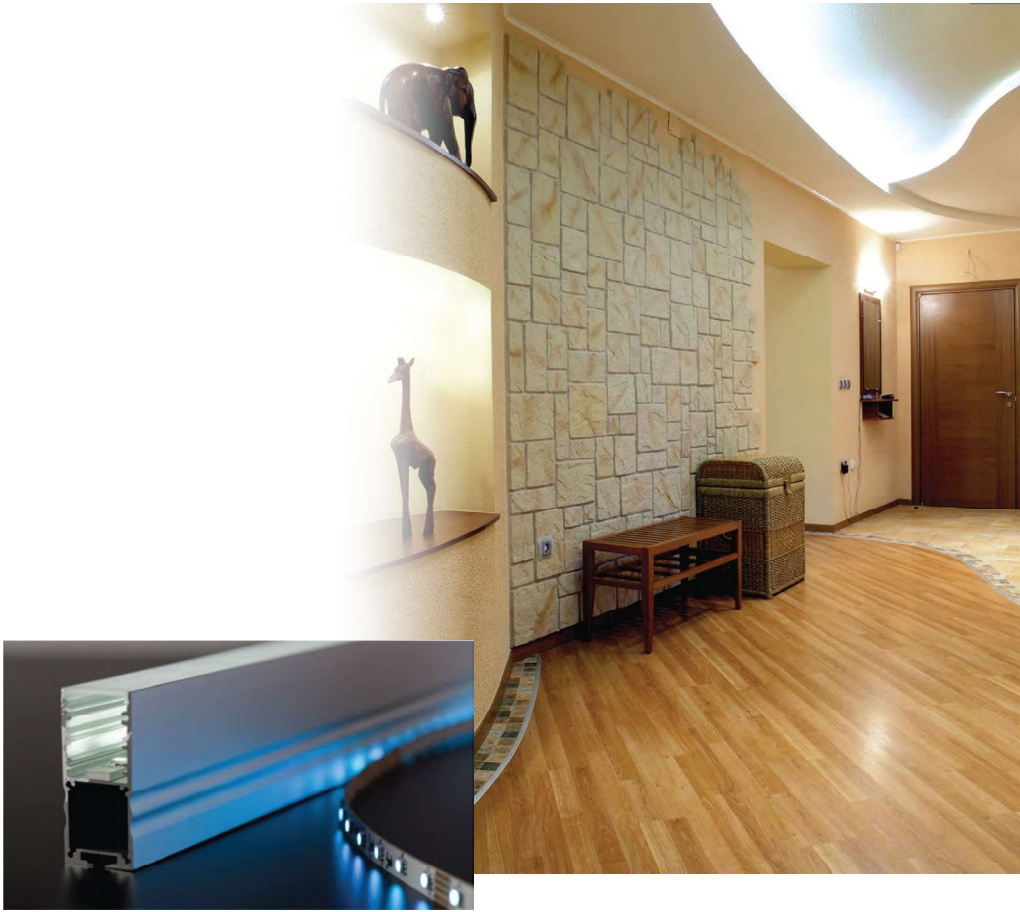



LED Profiles Product

RSL -7




RSL -15






RSw -15




RSL -15




SL -7




SL -45





AC -13




PL -35




PLW -80




LP-AL-PLW80




PSW -80





ACL -13



PLS -12




Technical drawing of a mechanical part, likely a valve or actuator, showing a cross-section with dimensions. The drawing includes a central vertical section with a horizontal flange at the top and a horizontal pipe connection at the bottom. Dimensions are given in millimeters (mm). Key dimensions include: overall height 100 mm, overall width 80 mm, flange thickness 10 mm, and various internal diameters and radii.



Technical drawing of a rectangular plate with dimensions in mm. The overall width is 9.60 and the overall height is 7.80. The inner rectangular opening has a width of 6.00 and a height of 4.80. The thickness of the plate is 1.00. The drawing includes various fillet radii: R1.00 at the corners of the outer rectangle, R0.50 at the corners of the inner rectangle, and R0.25 at the corners of the central opening. There are also chamfers indicated by dashed lines.







SLW -20




RSW -20




SWL -80


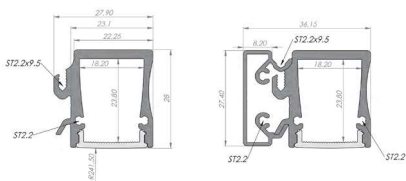


AC -13

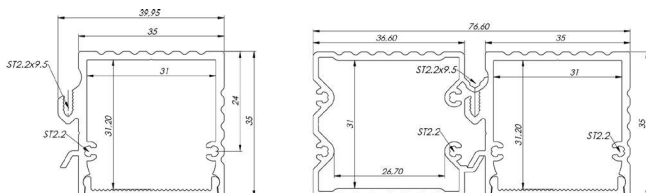




ASLw -120

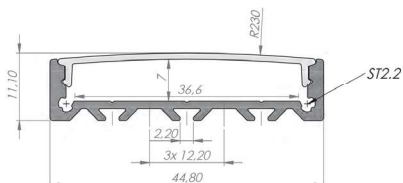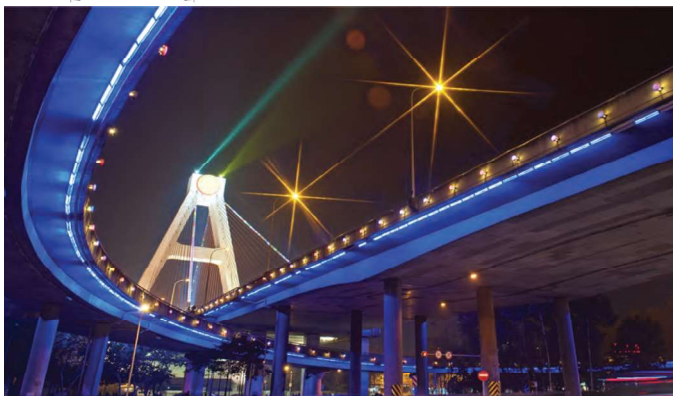



SLW -160




WLL -13




RPW -80

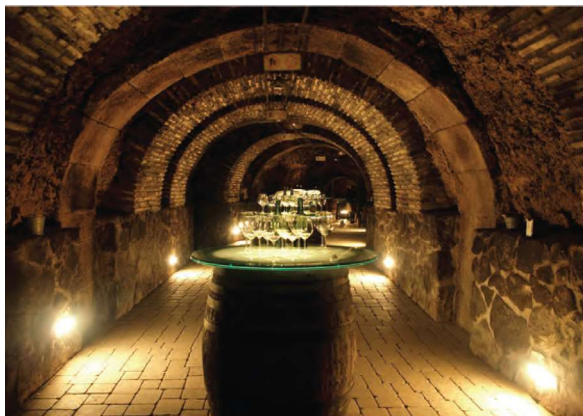



Alu-Round profile with 30° lens
LEDs type 3528




Alu-Round profile with 30° lens
LEDs type 5060






1:1

RC -23

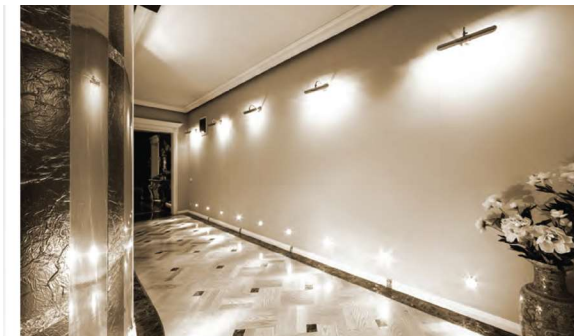


AFLL -80




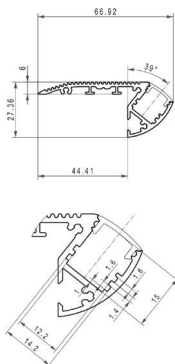




Heatsink Profiles Product

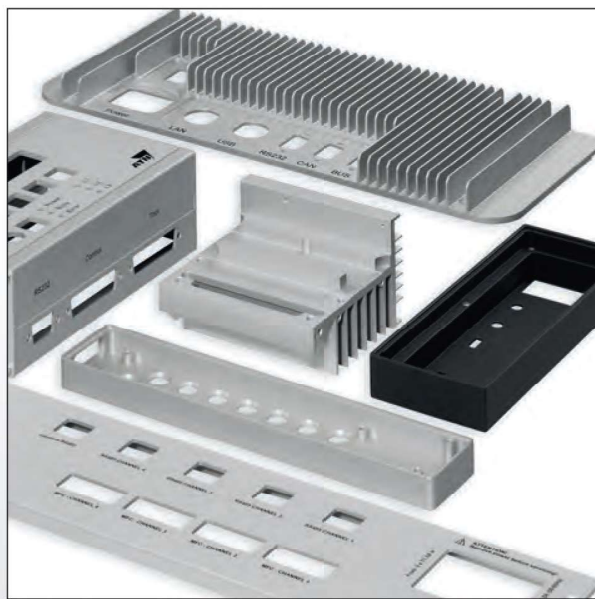


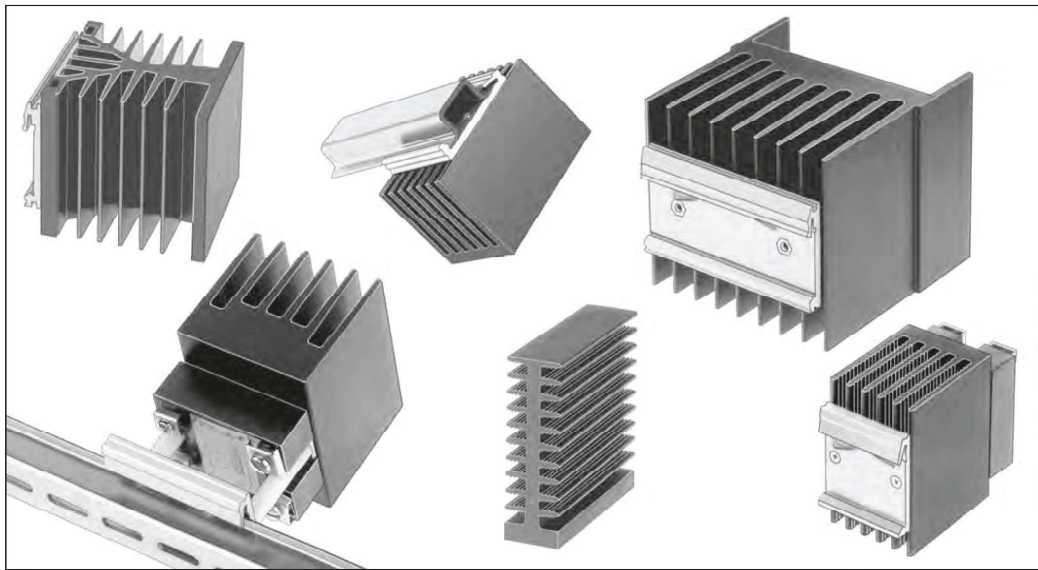


SK 437 ...




SK 521 ...




SK 476 ...




SK 582 ...




SK 559 ...




SK 486 ...




SK 453 ...

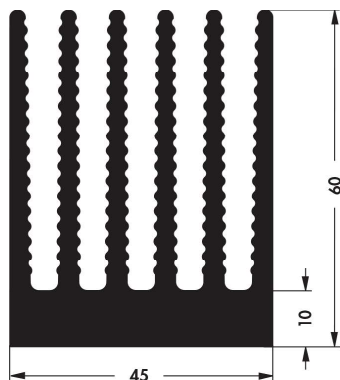


SK 455 ...

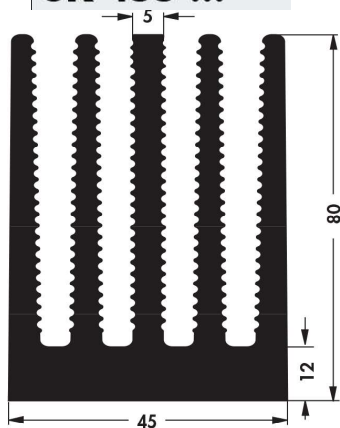


SK 467 ...

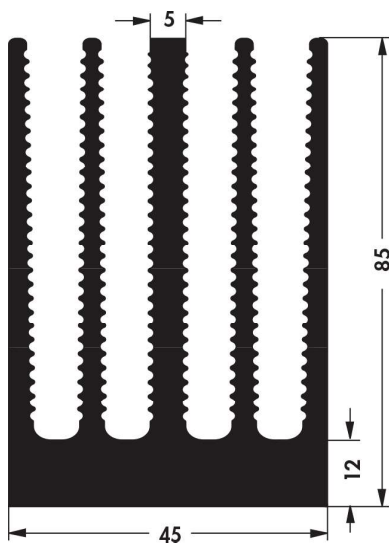



SK 450 ...

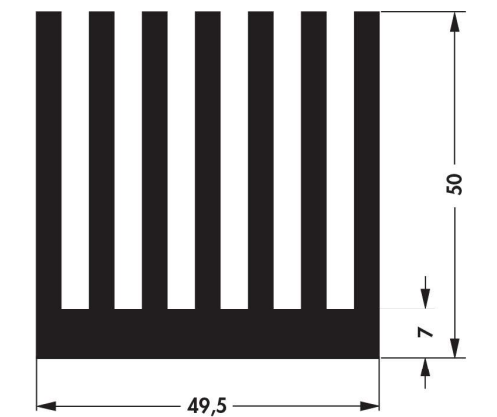


SK 567 ...

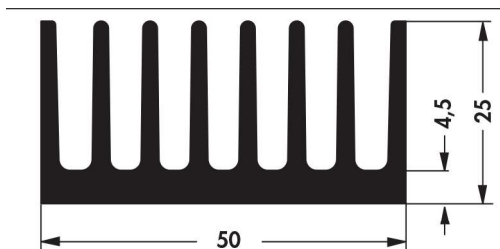


SK 434 ...

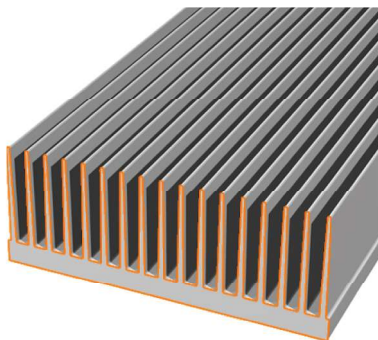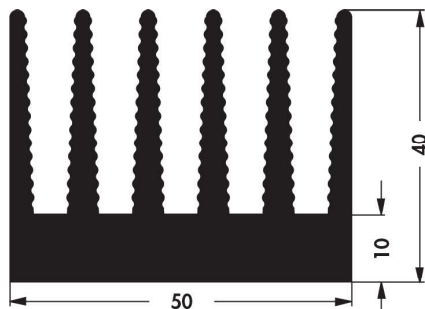


SK 475 ...

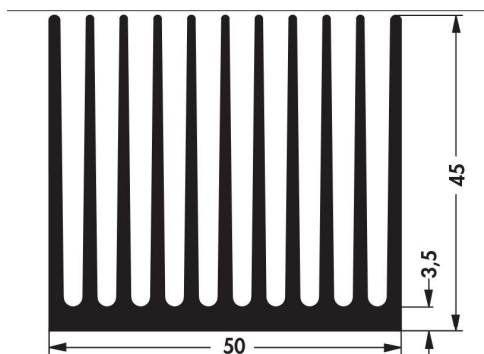


SK 527 ...

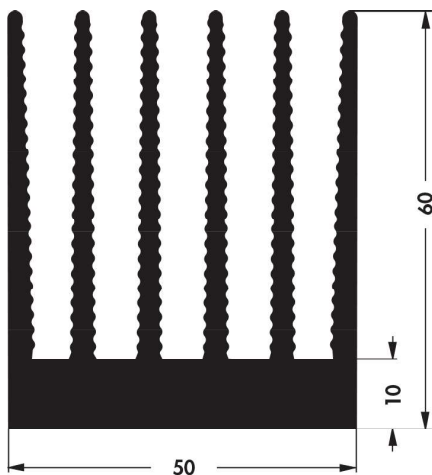


SK 468 ...

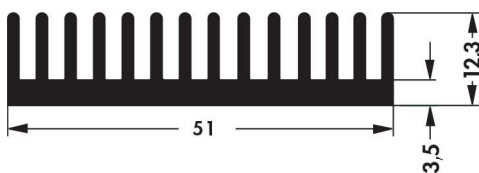


SK 180 ...

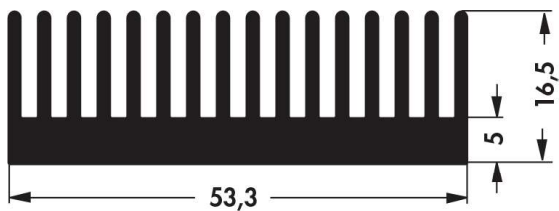


SK 429 ...

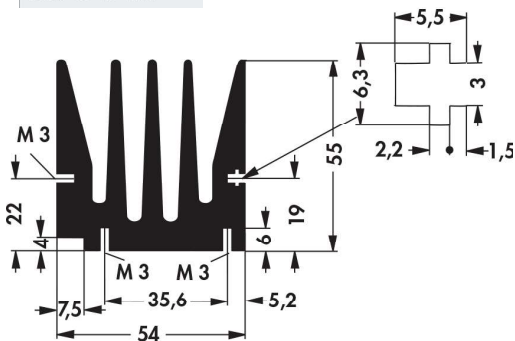


SK 436 ...




SK 50 ...

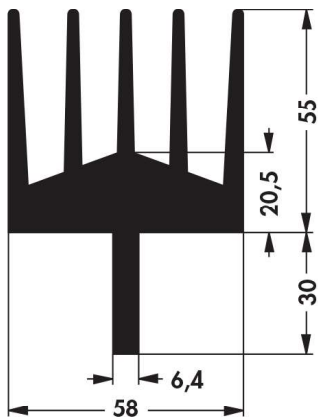


SK 100 ...


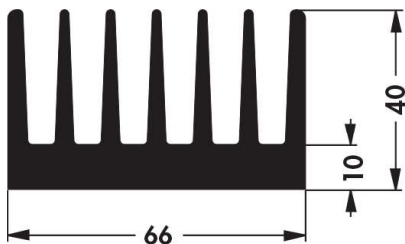



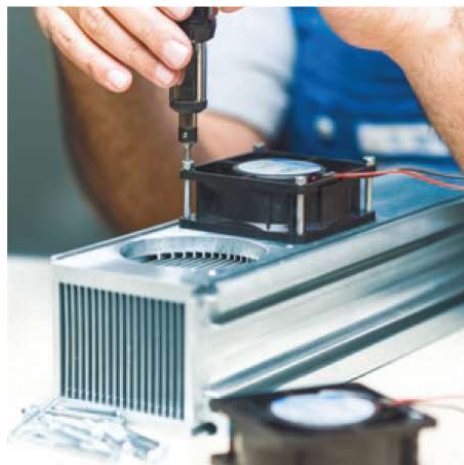


SK 135 ...

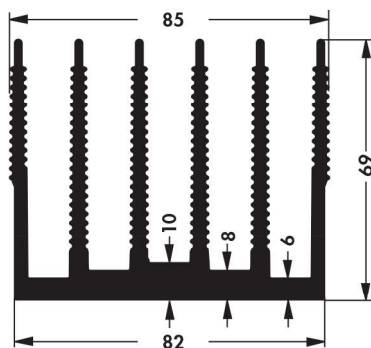


SK 594 ...

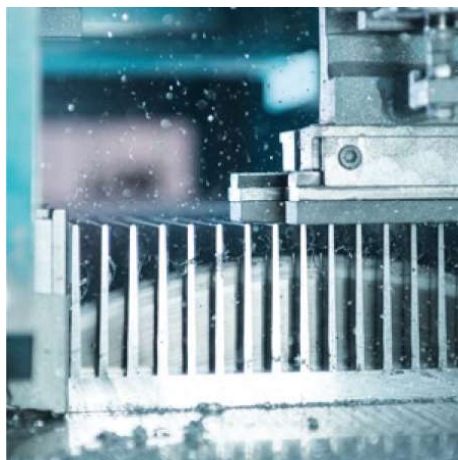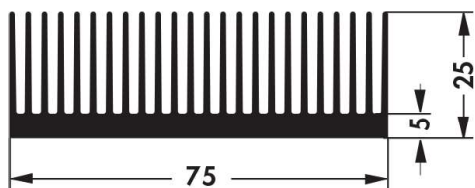

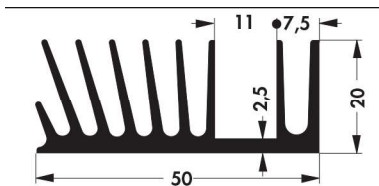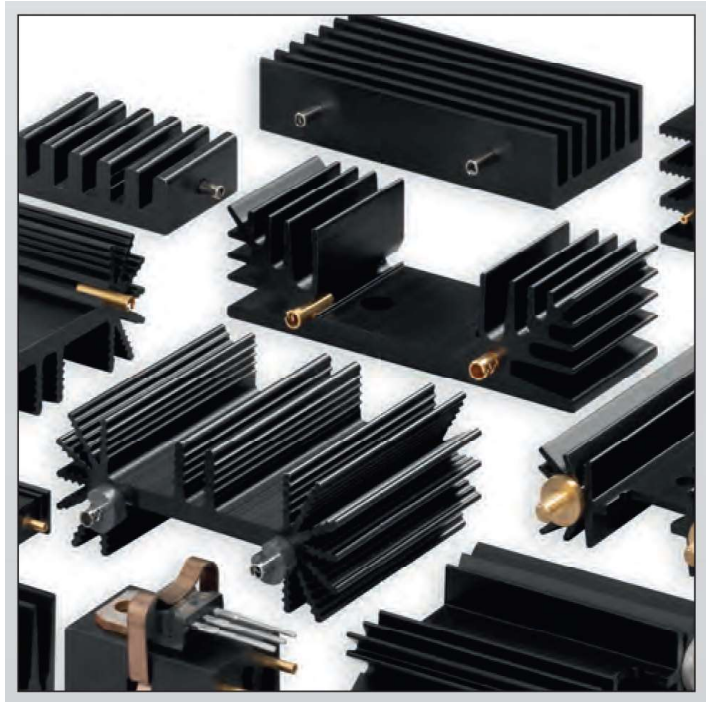


SK 181 94 C 3

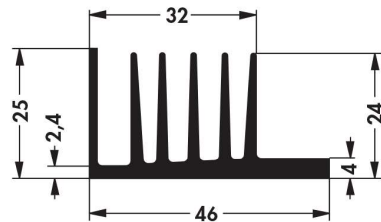


SK 107 ...


SK 97 ...

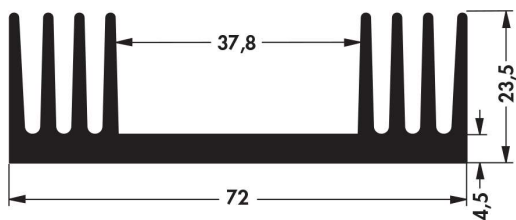


SK 05 ...

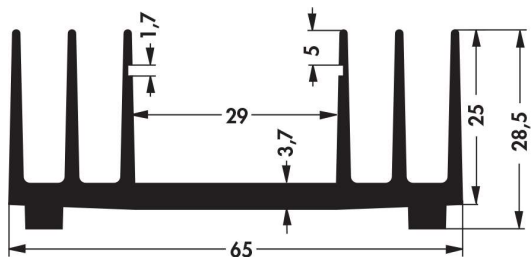


SK 39 ...

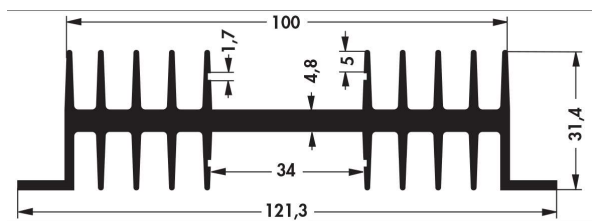


SK 404 ...

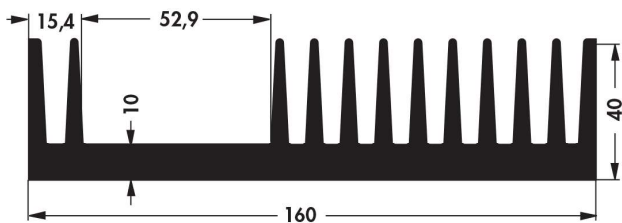


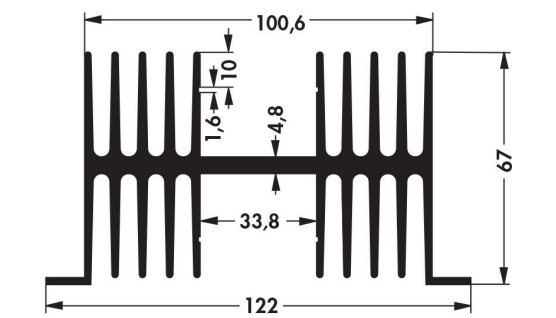

SK 30 ...


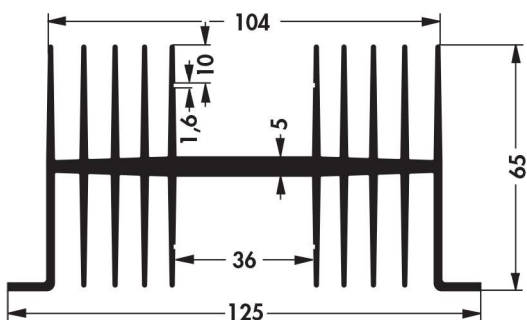


SK 34 ...

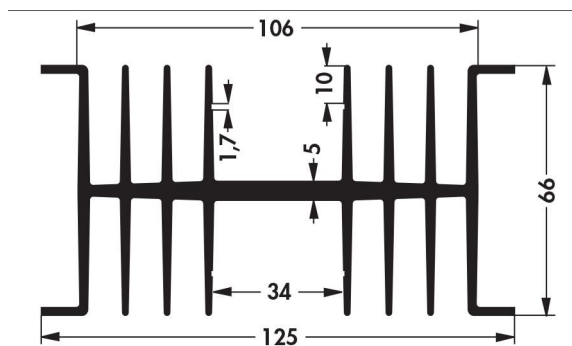


SK 14 ...


SK 65 ...

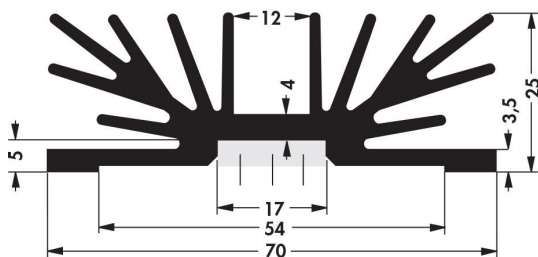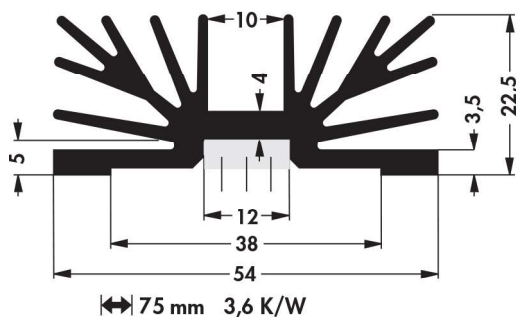


SK 64 ...

SK 419 ...

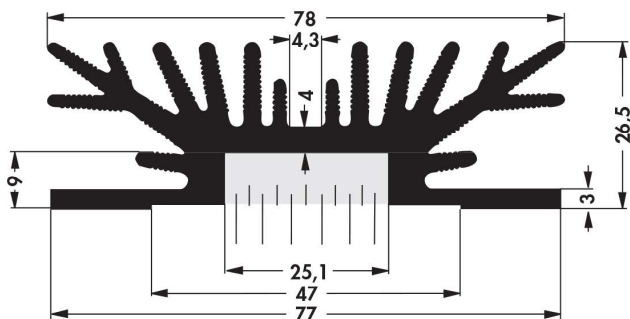


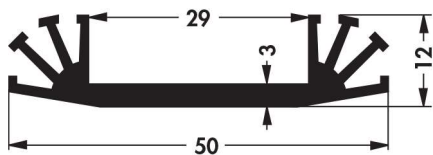

SK 31 ...

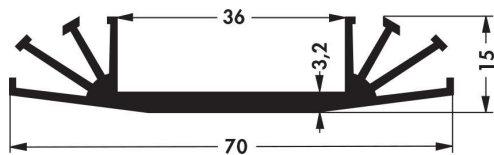


SK 07 ...

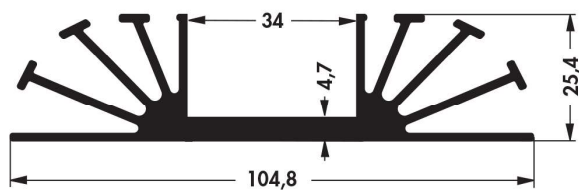


SK 16 ...

SK 500 ...

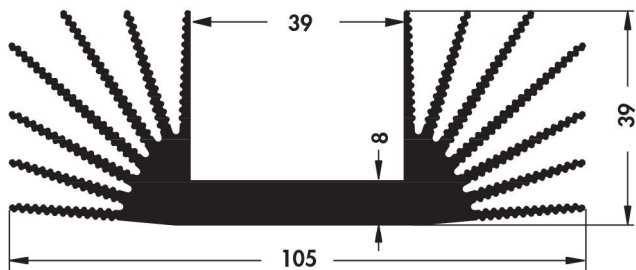


SK 16 ...

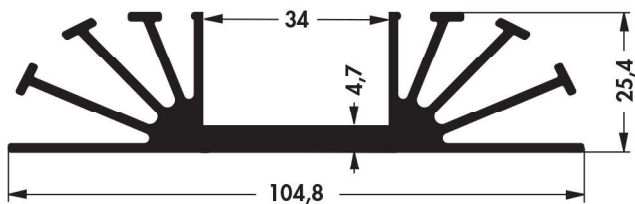





SK 185 ...

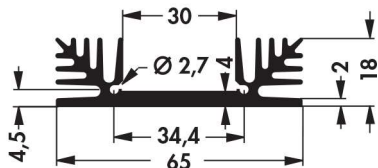


SK 48 ...




SK 08 ...

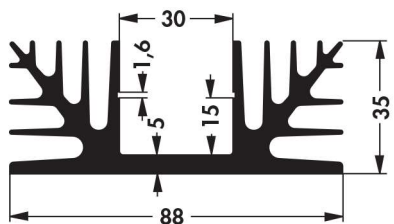


SK 88 ...

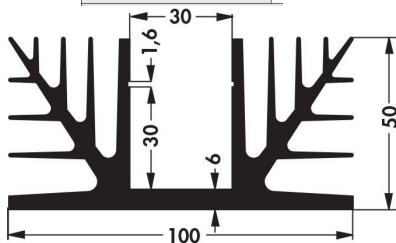





SK 556 ...




SK 140 ...




SK 89 ...

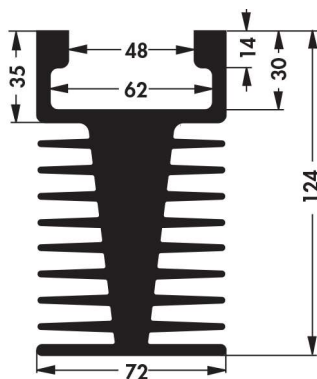


SK 15 ...




SK 06 ...




SK 83 ...




SK 11 ...




SK 172 ...




SK 110 ...




SK 23 ...




SK 108 ...





SK 109 ...

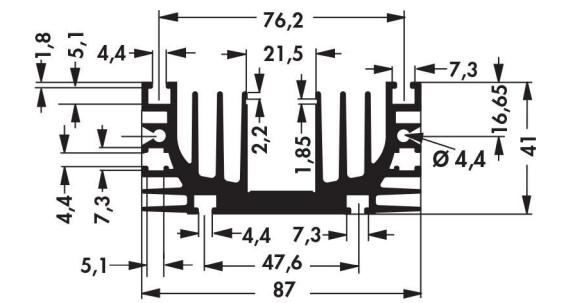

SK 432 ...

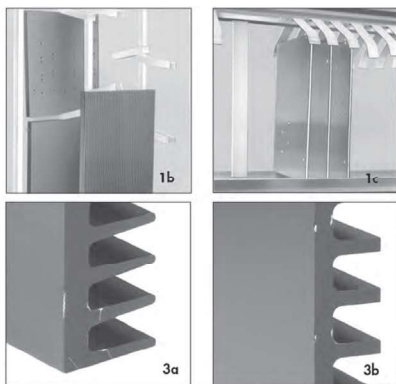


SK 40 ...

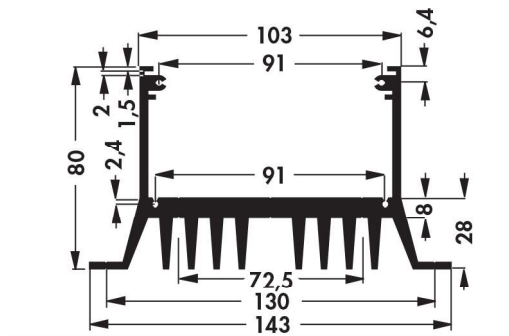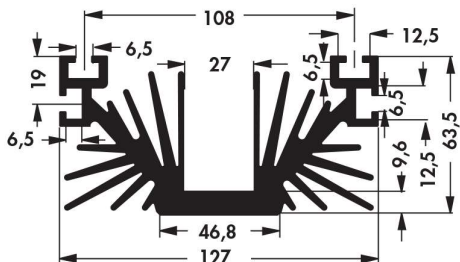


SK 61 ...



SK 489 ...




SK 573 ...




SK 576 ...




SK 481 ...





SK 514 ...




SK 574 ...





SK 589 ...




SK 482 ...



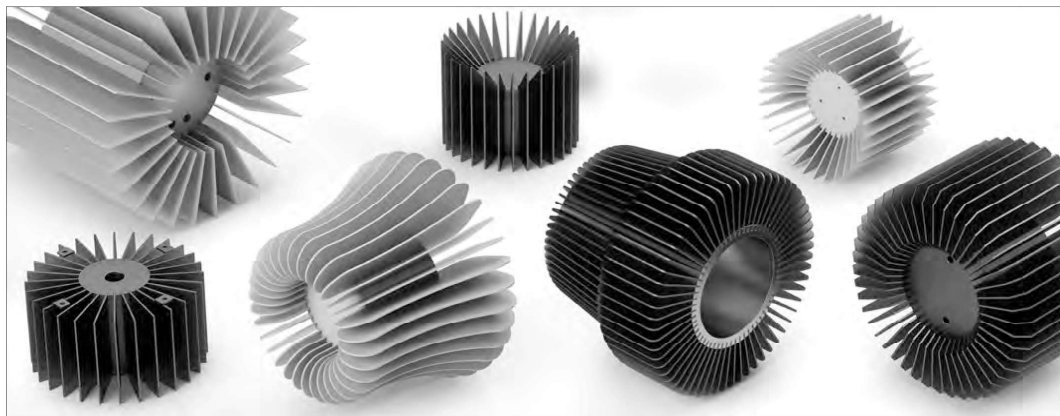


SK 615 ...




SK 599 ...




SK 592 ...



SK 602 ...




SK 577 ...




SK 46 ...


SK 569 ...

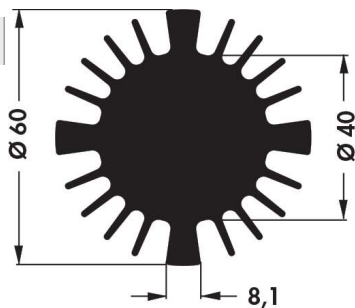


SK 598 ...




SK 578 ...




SK 618 ...




SK 585 ...

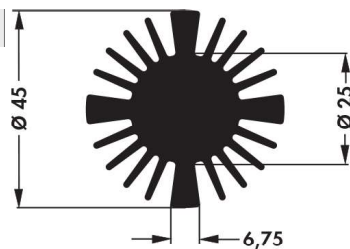





SK 619 ...




SK 620 ...




LA 1

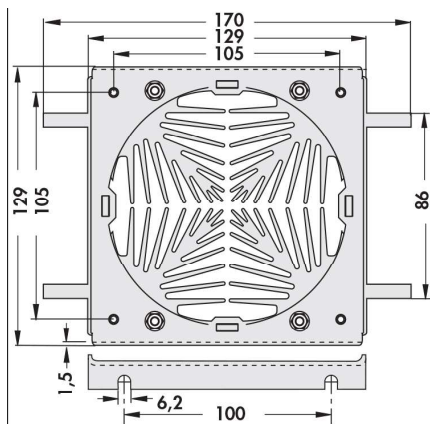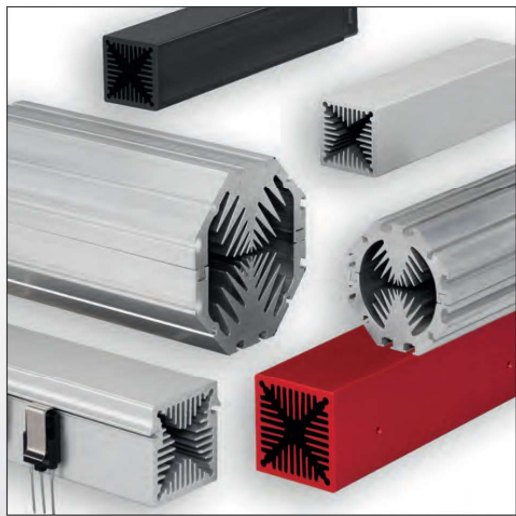


LAM 1

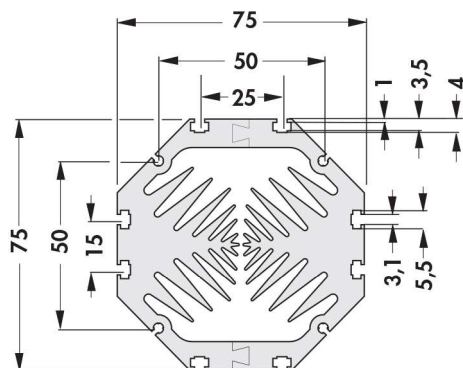


LAM 2

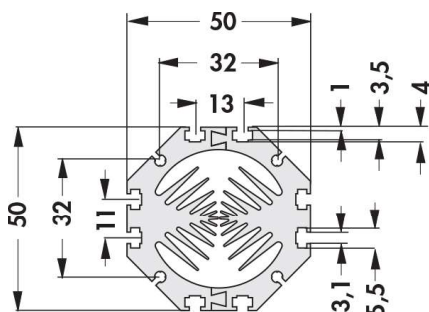



LAM 3 ...



LAM 3 K ...



LA V 10 ...

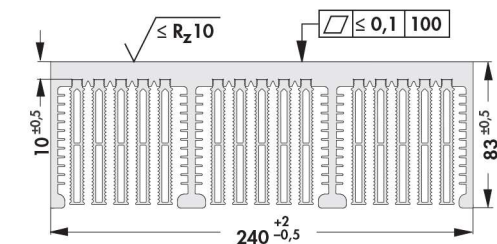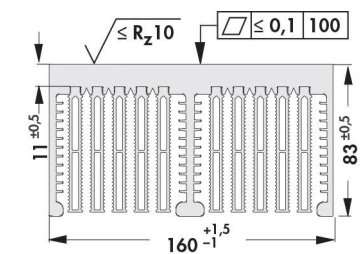




Structural Profiles Product


PROFILE 20 × 20


slot 5

Article no.:		202010	
I_x	0,72 cm ⁴	W_x	0,72 cm ³
I_y	0,72 cm ⁴	W_y	0,72 cm ³
Profile surface		1,80 cm ²	
Mass		0,48 kg/m	


PROFILE 20 × 20 2N90


slot 5

Article no.:		202020	
I_x	0,78 cm ⁴	W_x	0,76 cm ³
I_y	0,78 cm ⁴	W_y	0,76 cm ³
Profile surface		1,91 cm ²	
Mass		0,51 kg/m	


PROFILE 20 × 40


slot 5


Article no.:		202030	
I_x	0,41 cm ⁴	W_x	1,41 cm ³
I_y	5,14 cm ⁴	W_y	2,57 cm ³
Profile surface		3,32 cm ²	
Mass		0,89 kg/m	


PROFILE 40 × 40

slot 5

Article no.:		202031	
I_x	9,33 cm ⁴	W_x	4,62 cm ³
I_y	9,33 cm ⁴	W_y	4,62 cm ³
Profile surface		5,14 cm ²	
Mass		1,39 kg/m	






PROFILE 20 × 60

slot 5

Article no.:

202033

I_x	2,06 cm ⁴	W_x	2,06 cm ³	Profile surface	4,76 cm ²
I_y	16,09 cm ⁴	W_y	5,36 cm ³	Mass	1,28 kg/m

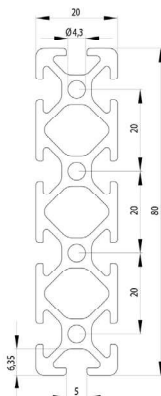


PROFILE 20 × 80

slot 5

Article no.:

202034

I_x	2,76 cm ⁴	W_x	2,76 cm ³	Profile surface	6,25 cm ²
I_y	36,88 cm ⁴	W_y	9,02 cm ³	Mass	1,67 kg/m



PROFILE 20 × 10

slot 5

Article no.:

202005

I_x	0,12 cm ⁴	W_x	0,22 cm ³	Profile surface	1,29 cm ²
I_y	0,53 cm ⁴	W_y	0,53 cm ³	Mass	0,22 kg/m





PROFILE 30 × 30L

slot 6

 Article no.: **202040**


lx	2,90 cm ⁴	Wx	1,94 cm ³	Profile surface	3,43 cm ²
ly	2,90 cm ⁴	Wy	1,94 cm ³	Mass	0,93 kg/m


PROFILE 30 × 30

slot 6

 Article no.: **202045**


lx	4,15 cm ⁴	Wx	2,77 cm ³	Profile surface	4,67 cm ²
ly	4,15 cm ⁴	Wy	2,77 cm ³	Mass	1,26 kg/m


PROFILE 30 × 30 2N90

slot 6

 Article no.: **202042**


lx	3,02 cm ⁴	Wx	1,98 cm ³	Profile surface	3,54 cm ²
ly	3,02 cm ⁴	Wy	1,98 cm ³	Mass	0,96 kg/m


PROFILE 30 × 60L

slot 6

 Article no.: **202050**


lx	5,54 cm ⁴	Wx	3,69 cm ³	Profile surface	6,13 cm ²
ly	21,22 cm ⁴	Wy	7,07 cm ³	Mass	1,65 kg/m






PROFILE 30 × 60

slot 6

 Article no.: **202052**

lx	7,92 cm ⁴	Wx	5,28 cm ³	Profile surface	8,47 cm ²
ly	29,30 cm ⁴	Wy	9,77 cm ³	Mass	2,29 kg/m





PROFILE 60 × 60L

slot 6

Article no.:		202053	
lx	39,98 cm ⁴	Wx	12,96 cm ³
ly	39,98 cm ⁴	Wy	12,96 cm ³
Profile surface		Mass	10,1 cm ²
			2,7 kg/m

PROFILE 30 × 120 L

slot 6

Article no.:		202057	
lx	11,04 cm ⁴	Wx	7,21 cm ³
ly	154,51 cm ⁴	Wy	25,44 cm ³
Profile surface		Mass	11,65 cm ²
			3,11 kg/m

PROFILE 60 × 120L


slot 6

Article no.:		202058	
lx	77,39 cm ⁴	Wx	25,8 cm ³
ly	261,87 cm ⁴	Wy	43,65 cm ³
Profile surface		Mass	18,78 cm ²
			5,05 kg/m

PROFILE 30 × 12L

slot 6

Article no.:		202015	
lx	0,25 cm ⁴	Wx	0,39 cm ³
ly	1,46 cm ⁴	Wy	0,98 cm ³
Profile surface		Mass	1,58 cm ²
			0,43 kg/m





PROFILE 40 × 40EL

slot 8

 Article no.: 202071
 Article no.: 202071LE1#3000


lx	7,38 cm ⁴	Wx	3,69 cm ³	Profile surface	5,07 cm ²
ly	7,38 cm ⁴	Wy	3,69 cm ³	Mass	1,37 kg/m


PROFILE 40 × 40L

slot 8

 Article no.: 202060
 Article no.: 202060LE1#3000


lx	9,00 cm ⁴	Wx	4,50 cm ³	Profile surface	6,46 cm ²
ly	9,00 cm ⁴	Wy	4,50 cm ³	Mass	1,74 kg/m


PROFILE 40 × 40L , BLACK ANODIZED

slot 8

Article no.: 202060 SW


lx	9,00 cm ⁴	Wx	4,50 cm ³	Profile surface	6,46 cm ²
ly	9,00 cm ⁴	Wy	4,50 cm ³	Mass	1,74 kg/m



PROFILE 40 × 40

slot 8

Article no.: 202072

lx	13,96 cm ⁴	Wx	6,98 cm ³	Profile surface	9,16 cm ²
ly	13,96 cm ⁴	Wy	6,98 cm ³	Mass	2,47 kg/m






PROFILE 40 × 40L 1N

slot 8

Article no.: 202065

lx	9,54 cm ⁴	Wx	4,66 cm ³	Profile surface	6,61 cm ²
ly	9,01 cm ⁴	Wy	4,50 cm ³	Mass	1,78 kg/m




PROFILE 40 × 40L 2N90

slot 8

Article no.: 202070

lx	9,64 cm ⁴	Wx	4,70 cm ³	Profile surface	6,80 cm ²
ly	9,64 cm ⁴	Wy	4,70 cm ³	Mass	1,84 kg/m




PROFILE 40 × 40L 2N180

slot 8

Article no.: 202068

lx	9,02 cm ⁴	Wx	4,51 cm ³	Profile surface	6,77 cm ²
ly	10,11 cm ⁴	Wy	5,05 cm ³	Mass	1,83 kg/m




PROFILE 40 × 40L 3N

slot 8

Article no.: 202069

lx	9,62 cm ⁴	Wx	4,70 cm ³	Profile surface	6,96 cm ²
ly	10,22 cm ⁴	Wy	5,11 cm ³	Mass	1,90 kg/m







CLAMP PROFILE 40 × 40

slot 8

Article no.:

202063

lx	9,51 cm ⁴	Wx	4,76 cm ³	Profile surface	7,51 cm ²
ly	12,27 cm ⁴	Wy	6,14 cm ³	Mass	2,30 kg/m




CLAMP PROFILE 40 × 40 - 180°

slot 8

Article no.:

202064

lx	11,41 cm ⁴	Wx	5,71 cm ³	Profile surface	8,41 cm ²
ly	13,08 cm ⁴	Wy	6,54 cm ³	Mass	2,56 kg/m



PROFILE 40 × 80L

slot 8


Article no.:

202080

Article no.:

202080LE1#3000

lx	16,60 cm ⁴	Wx	8,30 cm ³	Profile surface	11,38 cm ²
ly	69,54 cm ⁴	Wy	17,38 cm ³	Mass	3,04 kg/m




PROFILE 40 × 80L BLACK ANODIZED


slot 8

Article no.:

202080SW

lx	16,60 cm ⁴	Wx	8,30 cm ³	Profile surface	11,38 cm ²
ly	69,54 cm ⁴	Wy	17,38 cm ³	Mass	3,04 kg/m






PROFILE 40 × 80

slot 8

Article no.:

202081

I_x	26,87 cm ⁴	W_x	13,44 cm ³	Profile surface	16,76 cm ²
I_y	101,19 cm ⁴	W_y	25,29 cm ³	Mass	4,53 kg/m




PROFILE 40 × 80L 2N

slot 8

Article no.:

202082

I_x	17,73 cm ⁴	W_x	8,63 cm ³	Profile surface	11,60 cm ²
I_y	70,87 cm ⁴	W_y	17,72 cm ³	Mass	3,13 kg/m




PROFILE 40 × 80 3N90

slot 8

Article no.:

202079

I_x	18,24 cm ⁴	W_x	9,17 cm ³	Profile surface	11,98 cm ²
I_y	76,12 cm ⁴	W_y	17,72 cm ³	Mass	3,14 kg/m



PROFILE 80 × 80L

slot 8

Article no.:

202090

I_x	134,06 cm ⁴	W_x	33,51 cm ³	Profile surface	19,75 cm ²
I_y	134,06 cm ⁴	W_y	33,51 cm ³	Mass	5,33 kg/m





PROFILE 80 × 80

slot 8

 Article no.: **202091**


lx	187,70 cm ⁴	Wx	46,92 cm ³	Profile surface	26,66 cm ²
ly	187,70 cm ⁴	Wy	46,92 cm ³	Mass	7,19 kg/m


PROFILE 40 × 120L

slot 8

 Article no.: **202083**


lx	24,22 cm ⁴	Wx	12,11 cm ³	Profile surface	16,12 cm ²
ly	220,54 cm ⁴	Wy	36,76 cm ³	Mass	4,35 kg/m



PROFILE 40 × 120

slot 8

 Article no.: **202084**

lx	39,80 cm ⁴	Wx	19,90 cm ³	Profile surface	24,38 cm ²
ly	322,66 cm ⁴	Wy	53,77 cm ³	Mass	6,58 kg/m






PROFILE 80 × 120L

slot 8

Article no.:

202095

I_x	201,89 cm ⁴	W_x	50,47 cm ³	Profile surface	30,13 cm ²
I_y	421,67 cm ⁴	W_y	68,34 cm ³	Mass	8,13 kg/m




PROFILE 80 × 120

slot 8

Article no.:

202096

Ix	274,86 cm ⁴	Wx	68,71 cm ³	Profile surface	40,05 cm ²
Iy	574,86 cm ⁴	Wy	92,72 cm ³	Mass	10,81 kg/m

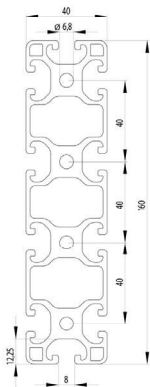

PROFILE 40 × 160L

slot 8

Article no.:

202085

I_x	31,81 cm ⁴	W_x	15,90 cm ³	Profile surface	20,90 cm ²
I_y	500,32 cm ⁴	W_y	62,54 cm ³	Mass	5,64 kg/m






PROFILE 40 × 160

slot 8

Article no.: 202086


I_x	52,72 cm ⁴	W_x	26,36 cm ³	Profile surface	32,00 cm ²
I_y	739,62 cm ⁴	W_y	92,45 cm ³	Mass	8,64 kg/m


PROFILE 80 × 160L

slot 8

Article no.: 202099


I_x	267,07 cm ⁴	W_x	66,77 cm ³	Profile surface	37,80 cm ²
I_y	907,88 cm ⁴	W_y	113,48 cm ³	Mass	10,21 kg/m



PROFILE 80 × 160

slot 8

Article no.: 202100

I_x	360,89 cm ⁴	W_x	90,22 cm ³	Profile surface	50,07 cm ²
I_y	1228,33 cm ⁴	W_y	153,54 cm ³	Mass	13,52 kg/m






PROFILE 40 × 16L

slot 8


Article no.:		202056	
I_x	0,64 cm ⁴	W_x	0,78 cm ³
I_y	3,34 cm ⁴	W_y	1,67 cm ³
Profile surface		2,24 cm ²	
Mass		0,60 kg/m	



PROFILE 40 × 16

slot 8


Article no.:		202055	
I_x	1,05 cm ⁴	W_x	1,22 cm ³
I_y	6,89 cm ⁴	W_y	3,45 cm ³
Profile surface		4,24 cm ²	
Mass		1,12 kg/m	



PROFILE 80 × 16

slot 8

Article no.:		202088	
I_x	2,15 cm ⁴	W_x	2,69 cm ³
I_y	50,76 cm ⁴	W_y	12,69 cm ³
Profile surface		8,13 cm ²	
Mass		2,20 kg/m	



PROFILE 160 × 16

slot 8

Article no.:		202089	
I_x	3,80 cm ⁴	W_x	4,25 cm ³
I_y	307,83 cm ⁴	W_y	38,48 cm ³
Profile surface		13,88 cm ²	
Mass		3,75 kg/m	





PROFILE 40 × 40L | 45°

slot 8

 Article no.: **202067**


lx	6,50 cm ⁴	Wx	2,90 cm ³	Profile surface	5,58 cm ²
ly	6,50 cm ⁴	Wy	2,90 cm ³	Mass	1,50 kg/m


PROFILE 40 × 40 | 45°

slot 8

 Article no.: **202066**


lx	9,39 cm ⁴	Wx	4,08 cm ³	Profile surface	7,30 cm ²
ly	9,39 cm ⁴	Wy	4,08 cm ³	Mass	1,97 kg/m


PROFILE 40 × 40L R40 - 90°

slot 8

 Article no.: **202061**


lx	6,65 cm ⁴	Wx	3,04 cm ³	Profile surface	5,72 cm ²
ly	6,65 cm ⁴	Wy	3,04 cm ³	Mass	1,54 kg/m


PROFILE R40 / R80 - 30°

slot 8

 Article no.: **202073**


lx	6,42 cm ⁴	Wx	2,84 cm ³	Profile surface	6,20 cm ²
ly	8,90 cm ⁴	Wy	3,80 cm ³	Mass	1,67 kg/m



PROFILE R40 / R80 - 45°

slot 8

 Article no.: **202074**

lx	21,33 cm ⁴	Wx	6,74 cm ³	Profile surface	10,23 cm ²
ly	16,06 cm ⁴	Wy	6,14 cm ³	Mass	2,76 kg/m






PROFILE R40/R80 - 60°

slot 8

Article no.: 202075

Ix	22,64 cm ⁴	Wx	5,96 cm ³	Profile surface	10,50 cm ²
Iy	34,92 cm ⁴	Wy	11,56 cm ³	Mass	2,82 kg/m




PROFILE R40/R80 - 90°

slot 8

Article no.: 202076

Ix	76,25 cm ⁴	Wx	18,69 cm ³	Profile surface	15,00 cm ²
Iy	76,25 cm ⁴	Wy	18,69 cm ³	Mass	4,05 kg/m




PROFILE 32 x 18

slot 8

Article no.: 202035

Ix	2,50 cm ⁴	Wx	1,70 cm ³	Profile surface	3,30 cm ²
Iy	2,50 cm ⁴	Wy	1,70 cm ³	Mass	0,90 kg/m



SHAFT CLAMP PROFILE

slot 8

Article no.: 99900040

Profile surface	1,36 cm ²
Mass	0,36 kg/m

SHAFT D14

Article no.: 99900039


Material:	Hardened steel, C153, polished
Mass:	1,21 kg/m



COVER AND CLOSURE PROFILE

slot 5

Slot 5 black	Article no.:	413035
Length		2000mm
Panel thicknesses		1-3mm
Material		PP+TPE




413040

COVER AND CLOSURE PROFILE

slot 6

Slot 6 black	Article no.:	413040
Length		2000mm
Panel thicknesses		2-4mm
Material		PP+TPE




413046

COVER AND CLOSURE PROFILE


slot 8

Slot 8 black	Article no.:	413045
Slot 8 transparent	Article no.:	413046
Length		2000mm
Panel thicknesses		4-6mm
Material		PP+TPE


COVER AND CLOSURE PROFILE

slot 8

Slot 8 transparent	Article no.:	413047
Length		2000mm
Panel thicknesses		0.8-3mm
Material		PP+TPE




413050

413060


SEALING PROFILE

slot 8

Sealing profile 4-6	Article no.:	413050
Panel thicknesses		4-6mm
Sealing profile 4-6	Article no.:	413060
Panel thicknesses		2-4mm
Length		Rolled goods
Material		TPE black




413050




413060




louvers Profiles Product

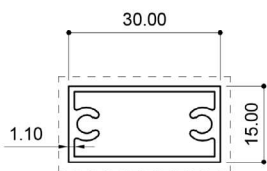


21161*
(0.342 Kg/m)




26177*
(0.410 Kg/m)

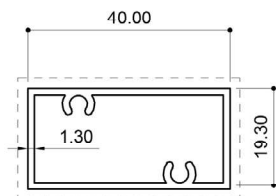


20101
(0.470 Kg/m)




20104
(0.447 Kg/m)




24341*
(0.350 Kg/m)




22634
(0.425 Kg/m)




20535
(0.490 Kg/m)




20014
(0.664 Kg/m)

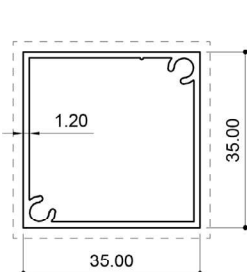


26022
(0.481 Kg/m)

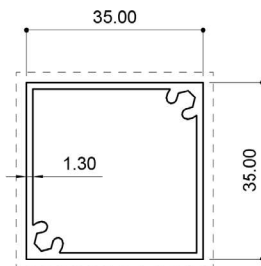


20622
(0.554 Kg/m)

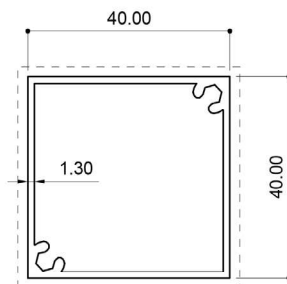


20621
(0.624 Kg/m)




11689
(0.268 Kg/m)

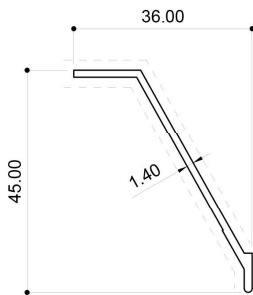


10102
(0.253 Kg/m)

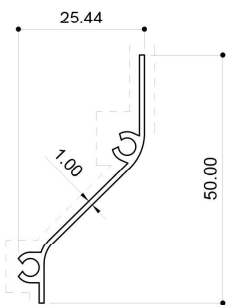


12624*
(0.221 Kg/m)

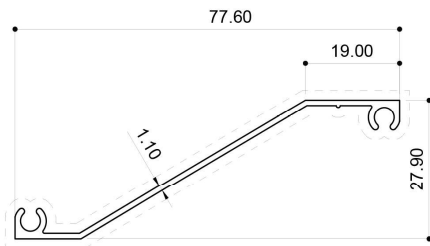


14590
(0.330 Kg/m)

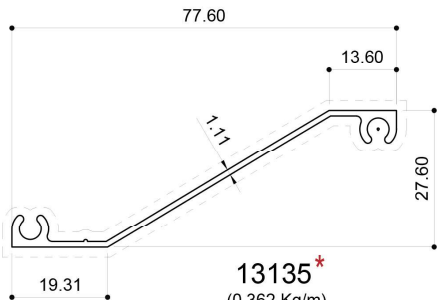


13135*
(0.362 Kg/m)

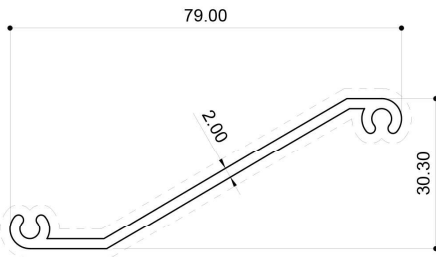


11417
(0.562 Kg/m)

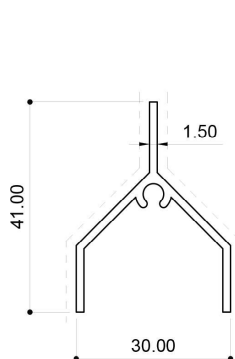


10213
(0.348 Kg/m)




12204
(0.253 Kg/m)

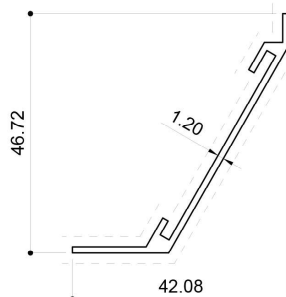


11436
(0.294 Kg/m)

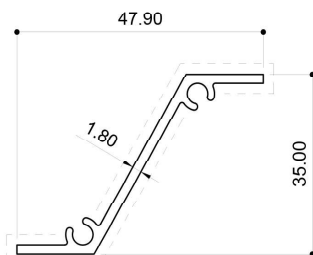


11692
(0.379 Kg/m)

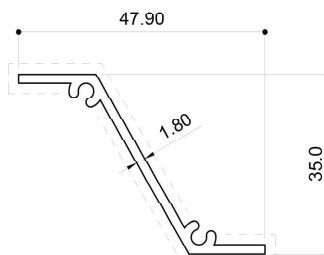




10248
(0.397 Kg/m)







11687
(0.258 Kg/m)

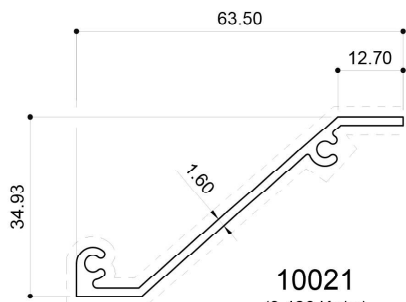


10021
(0.426 Kg/m)

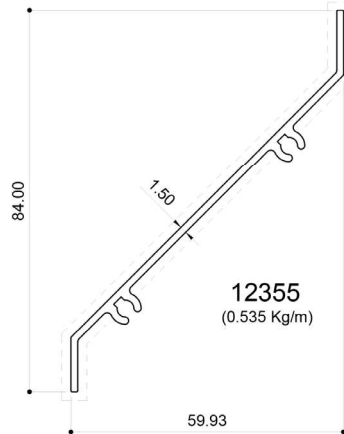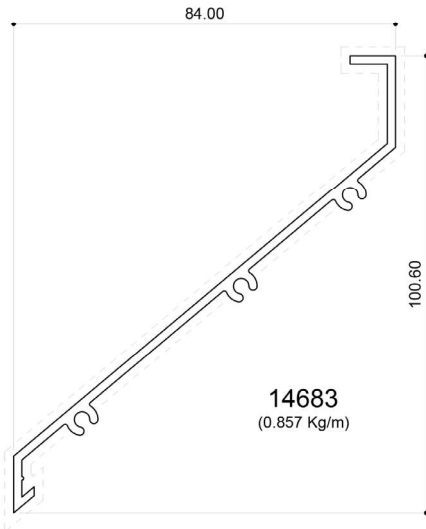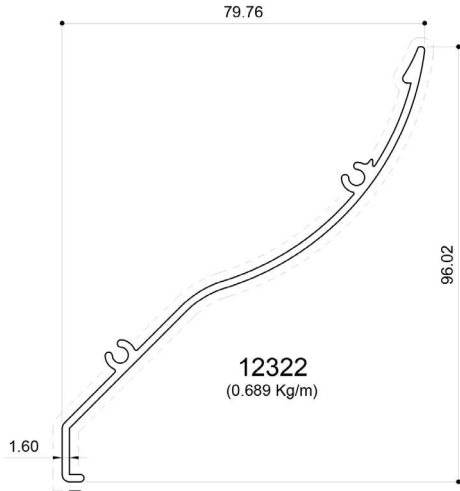

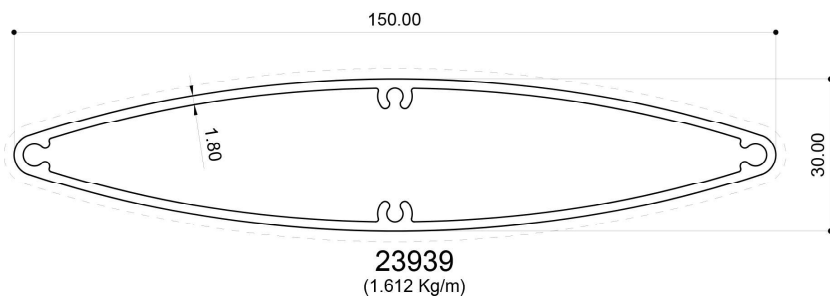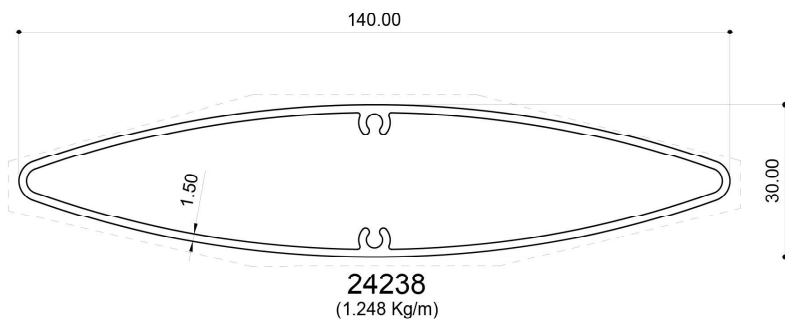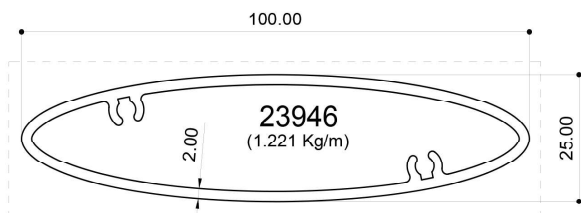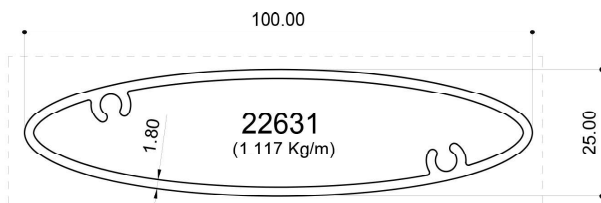





Hand Rail Product

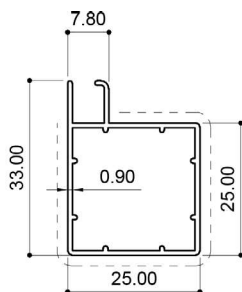


21515
(0.291Kg/m)




21182
(0.311 Kg/m)

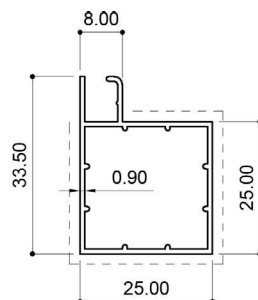


24813
(0.296 Kg/m)




24340
(0.320 Kg/m)




21041
(0.371 Kg/m)

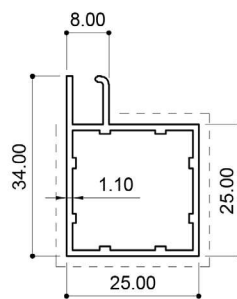


23700
(0.371 Kg/m)




21516
(0.332Kg/m)













21183
(0.353 Kg/m)




24811
(0.342 Kg/m)

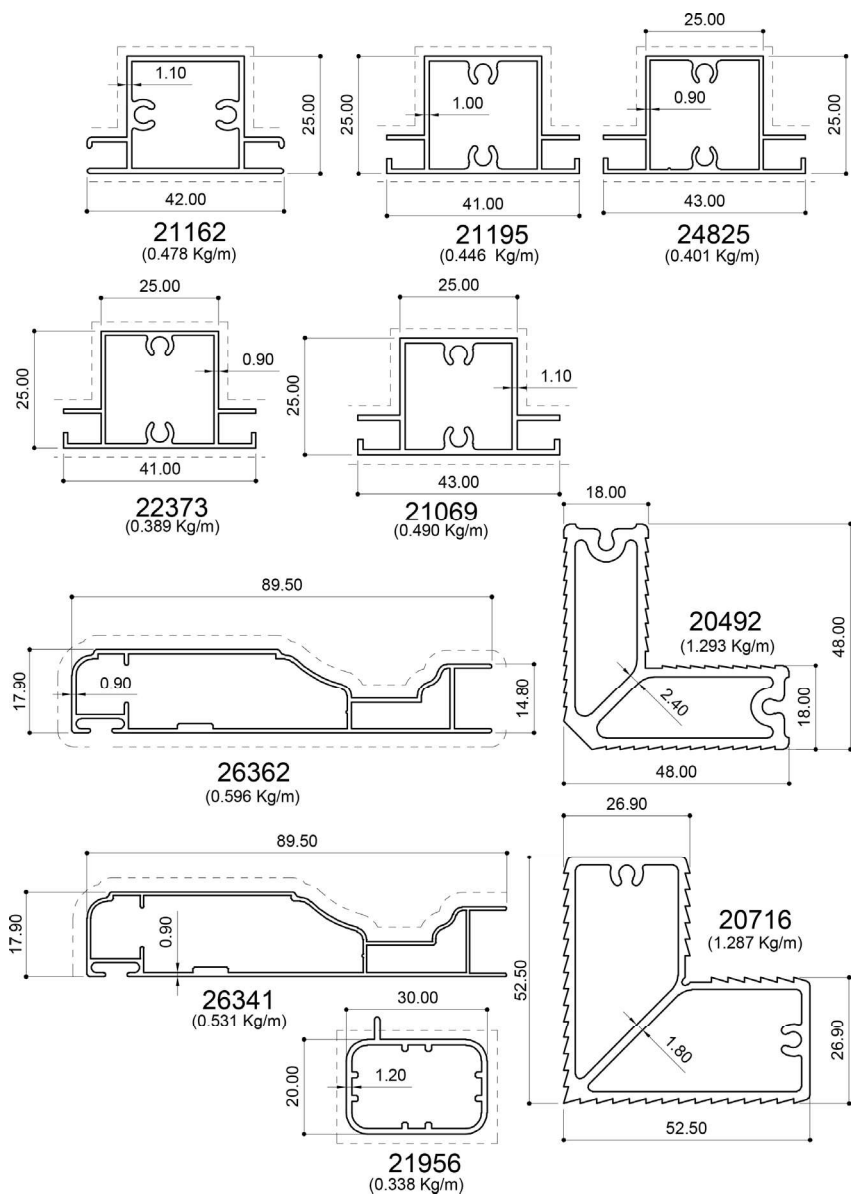

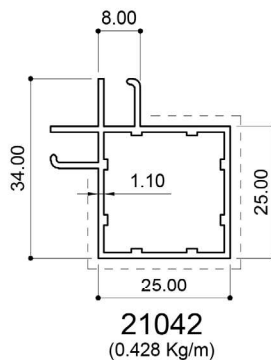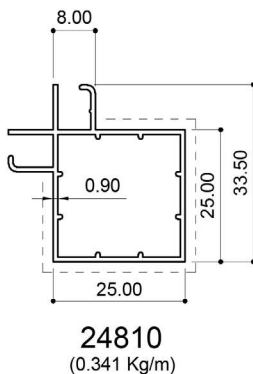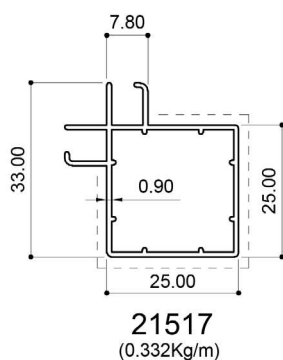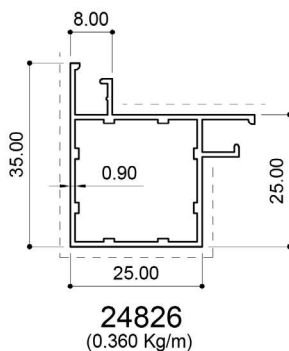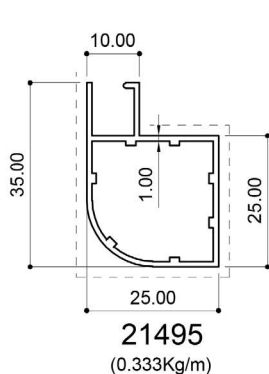





24824
(0.318 Kg/m)




21211
(0.406Kg/m)




22370
(0.369 Kg/m)




21060
(0.468Kg/m)




21194
(0.433 Kg/m)

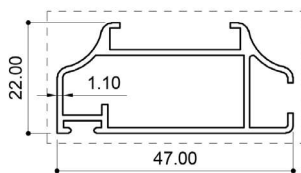


21077
(0.466 Kg/m)

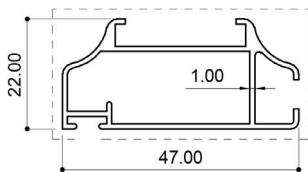


22396
(0.428 Kg/m)

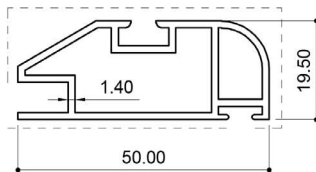











21244
(0.632 Kg/m)

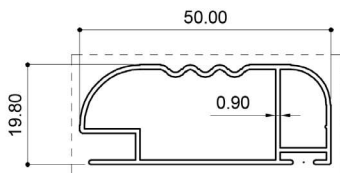




26028
(0.397 Kg/m)



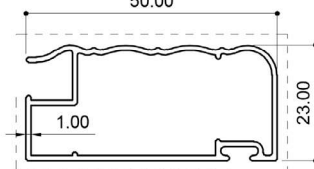



22117
(0.439 Kg/m)














CODE	DRAWING	DESCRIPTION	WEIGHT gr/m	JX cm4	JY cm4
FS 32042104		2 RAILS FIX FRAME	2393+320	"	"
FS 3205105		2 RAILS SUB SILL FRAME	1565+65	"	"
FS 3206		SILL FINISHING PROFILE	780	"	"
FS 3211		CENTRAL PROFILE	329	0.24	2.06
FS 3212		REINFORCED CENTRAL PROFILE	1351	2.73	29 .55
FS 3213			2161	5.05	118 .35
FS 3214			2971	7.30	307 .22

CODE	DRAWING	DESCRIPTION	WEIGHT gr/m	JX cm4	JY cm4
FS 320404		SINGLE RAIL FIX FRAME	1325+160	"	"
FS 3204212104		3 RAILS FIX FRAME	3340+480	"	"
FS 3224105		3 RAILS SUB SILL FRAME	2067+65	"	"
FS 3225		SINGLE RAIL LATCHING	631	"	"
FS 3226		WALL FINISHING	1196	"	"
FS 3227		SINGLE RAIL LATCHING	818	"	"
FS 3228		INSTALLATION FINISHING PROFILE	959	"	"


CODE	DRAWING	DESCRIPTION	WEIGHT gr/m	JX cm4	JY cm4
FS 3229		SINGLE RAIL LATCHING	682	"	"
FS 3230		SINGLE RAIL LATCHING	682	"	"
FS 3238		90° CORNER PROFILE	2706	"	"
FS 323940		LATCHING HANDLE PROFILE	2519+95	"	"
FS 3241		RAILS FINISHING PROFILE	790	"	"
FS 3242		REINFORCEMENT PLATE 13 MM X 20.4 MM	1594	"	"
FS 3243		REINFORCEMENT PLATE 13 MM X 44.4 MM	716	"	"

CODE	DRAWING	DESCRIPTION	WEIGHT gr/m	JX cm4	JY cm4
FS 3244		REINFORCEMENT PLATE 13 MM X 94.4 MM	5094	"	"
FS 3246		LATCHING HANDLE	767	"	"
FS 3247		SILL PROFILE	"	"	"
FS 3248		SINGLE ADAPTOR 14 MM	450	"	"
FS 3249		LATCHING HANDLES COVER	297	"	"
FS 3253		KEY LOCKS PROFILE	986	"	"
FS 3254		SINGLE ADAPTOR 9 MM	526	"	"

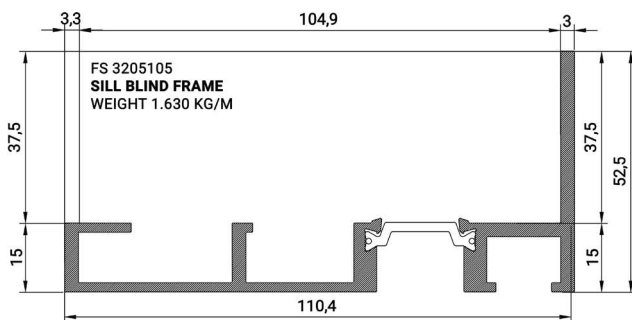








FS 3254
SINGLE GLASS ADAPTOR
WEIGHT 0.526 KG/M




FS 3255
FLY SCREEN ADAPTOR
WEIGHT 0.381 KG/M




FS 3248
SINGLE GLASS ADAPTOR
WEIGHT 0.450 KG/M

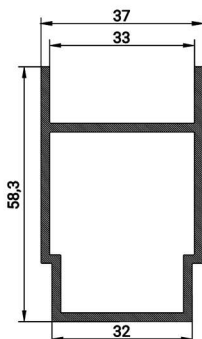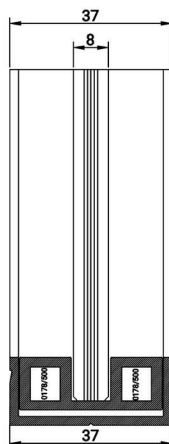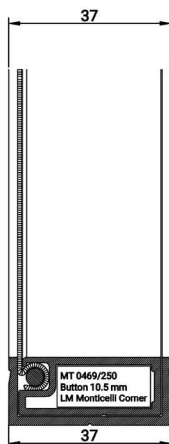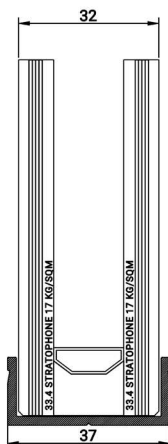


FS 3253
KEY LOCKS PROFILE
WEIGHT 0.986 KG/M

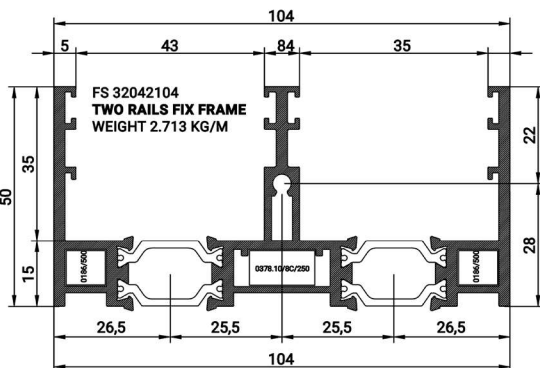


FS 32042104
TWO RAILS FIX FRAME
WEIGHT 2.713 KG/M

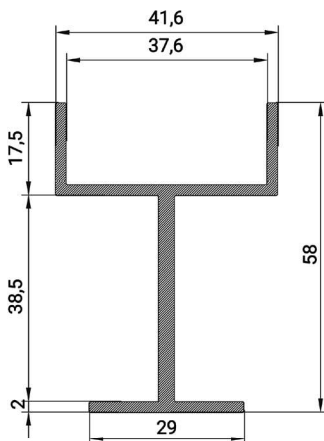





FS 3273
STONE SILL PROFILE
WEIGHT 0.860 KG/M

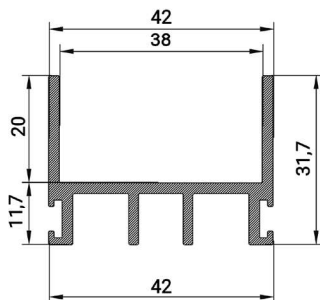



FS 3274
STONE SILL PROFILE
WEIGHT 0.688 KG/M

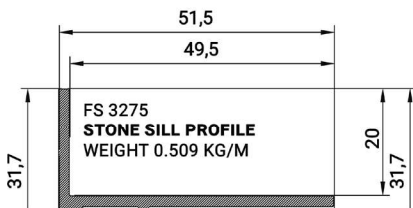


FS 3275
STONE SILL PROFILE
WEIGHT 0.509 KG/M

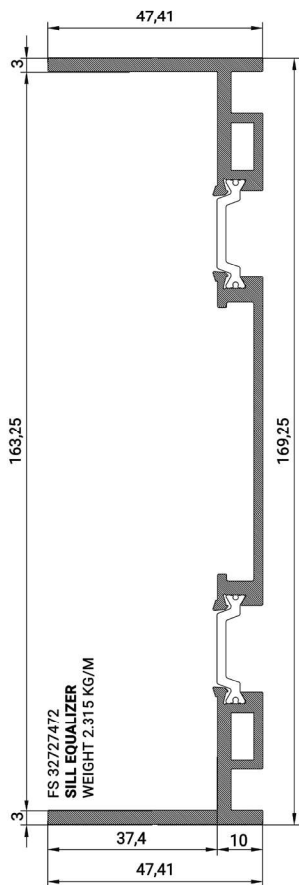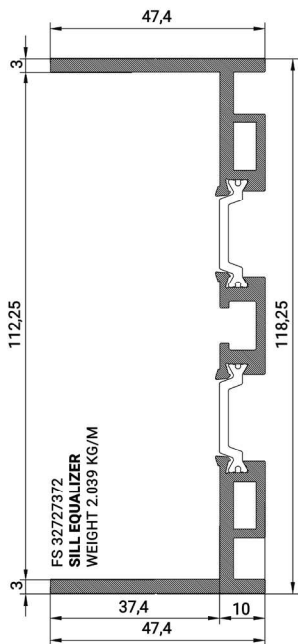


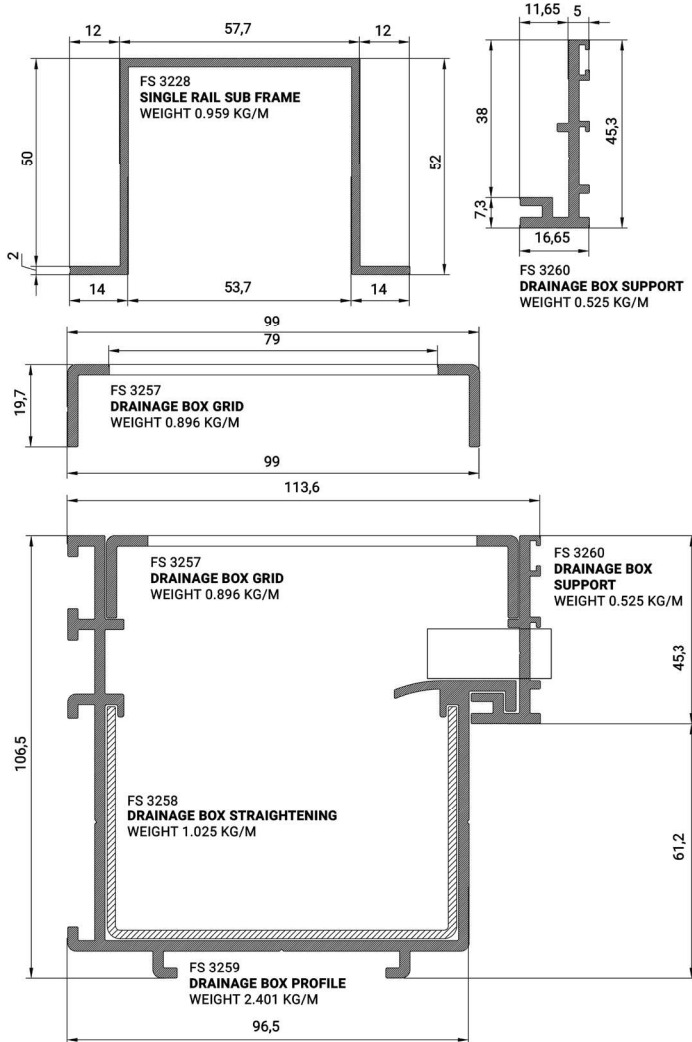

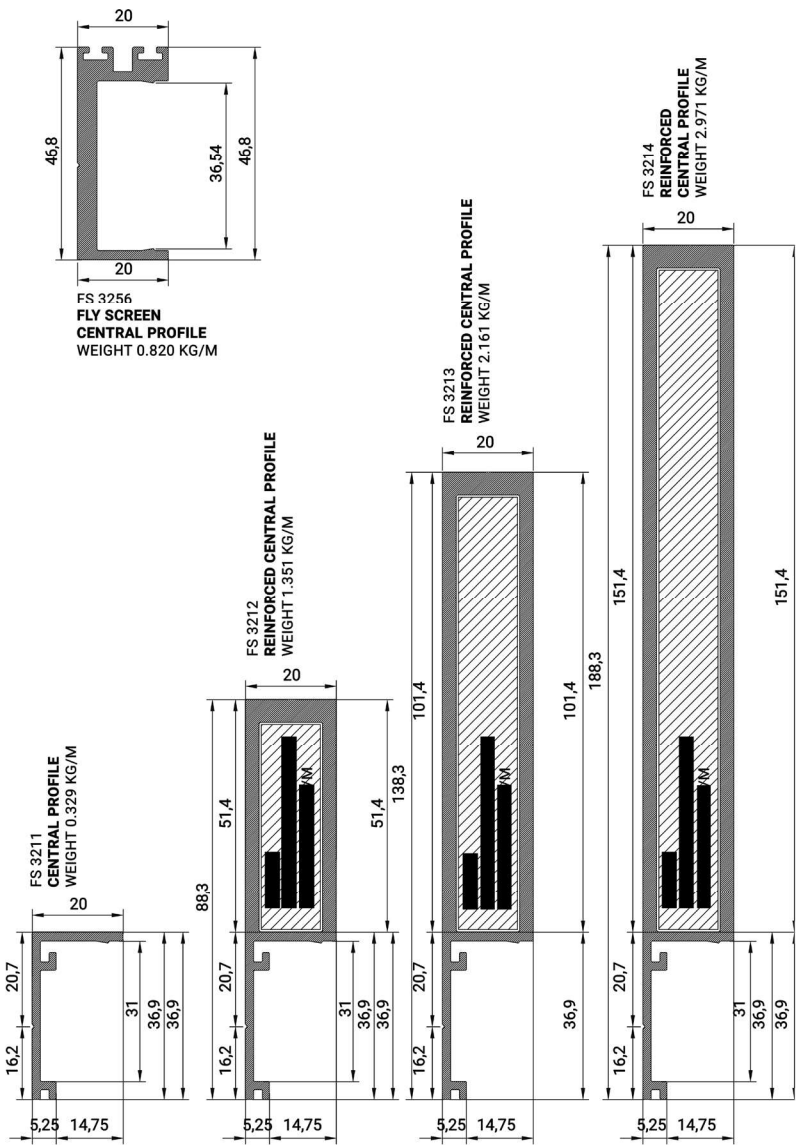


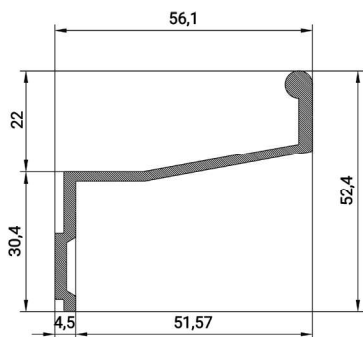


FS 3266
HANDLE FOR
CLOSING INVERSION
WEIGHT 0.668 KG/M

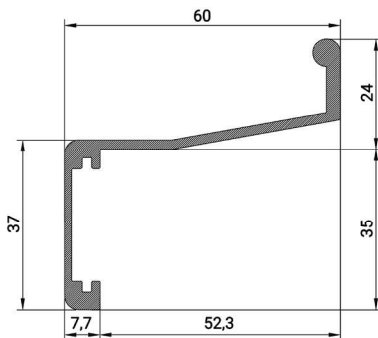


FS 3246
HANDLE FOR
MULTIPOINT CLOSING
WEIGHT 0.767 KG/M







FS 3249
MULTIPOINT LATCHING
COVER WEIGHT 0.266 KG/M

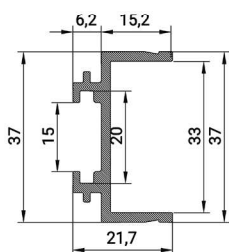


FS 3210
LATCHING HANDLE PROFILE
POLYCARBONATE

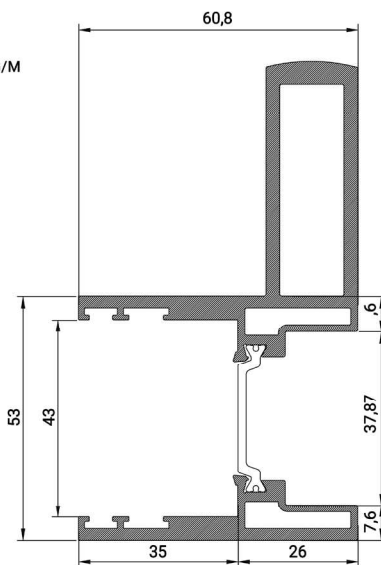


FS 3239401
4TH PANELS HANDLE PROFILE
WEIGHT 2.614 KG/M

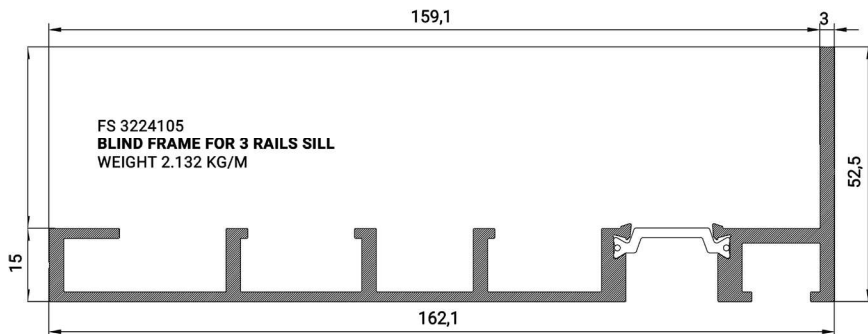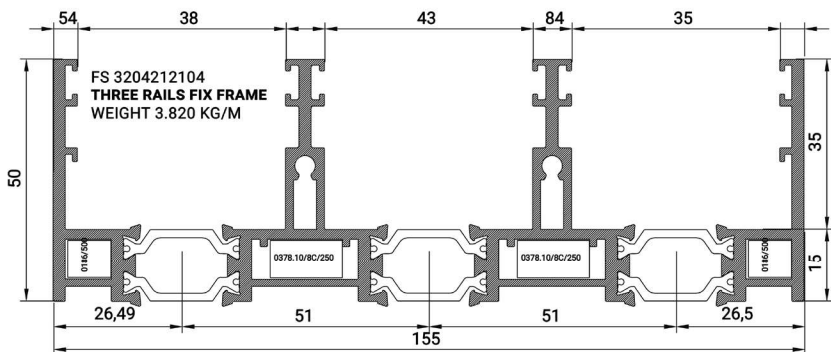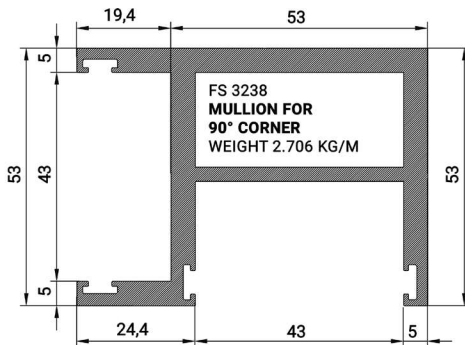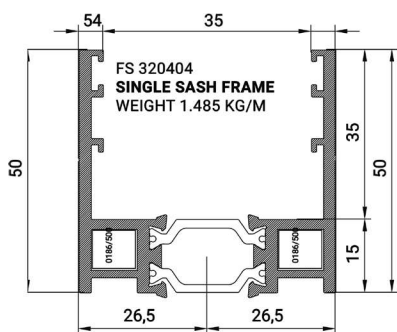





BP 003
GLAZING PROFILE
WEIGHT 0.254 KG/M




BP 005
**BALAUSTRADES GLAZING
POLYCARBONATE**

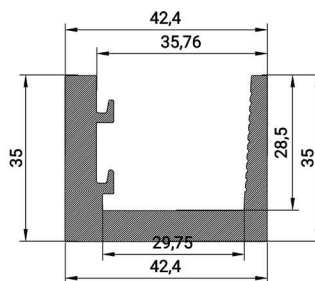


BP 002.1
BALAUSTRADE SILL PROFILE
WEIGHT 0.634 KG/M

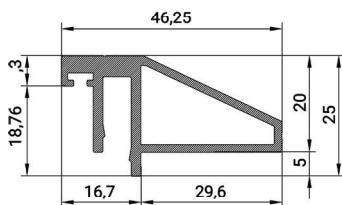


FS 3230
SINGLE RAIL WALL COVER
WEIGHT 0.682 KG/M

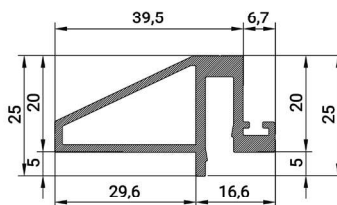


FS 3229
SINGLE RAIL WALL COVER
WEIGHT 0.682 KG/M

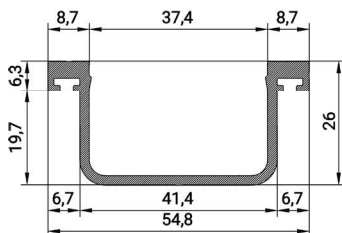


FS 3225
SINGLE RAIL INTERLOCK
WEIGHT 0.631 KG/M



BP 002
BALAUSTRADE TOP PROFILE
WEIGHT 0.253 KG/M

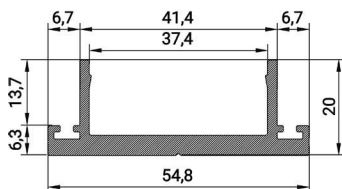


FS 3227
SINGLE RAIL INTERLOCK
WEIGHT 0.818 KG/M

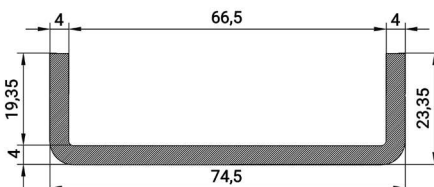


FS 3226
SINGLE RAIL INSTALLATION PROFILE
WEIGHT 1.196 KG/M

RS 323HR
SLIDING ROLLERS FOR HEAVY LOADS





**HORIZONTAL SLIDINGS ROLLERS WITH
LOADING CAPACITY 500 - 800 KG**


RS 313HR
SLIDING ROLLERS FOR SOFT LOADS





**HORIZONTAL SLIDINGS ROLLERS WITH
LOADING CAPACITY 100 - 250 KG**

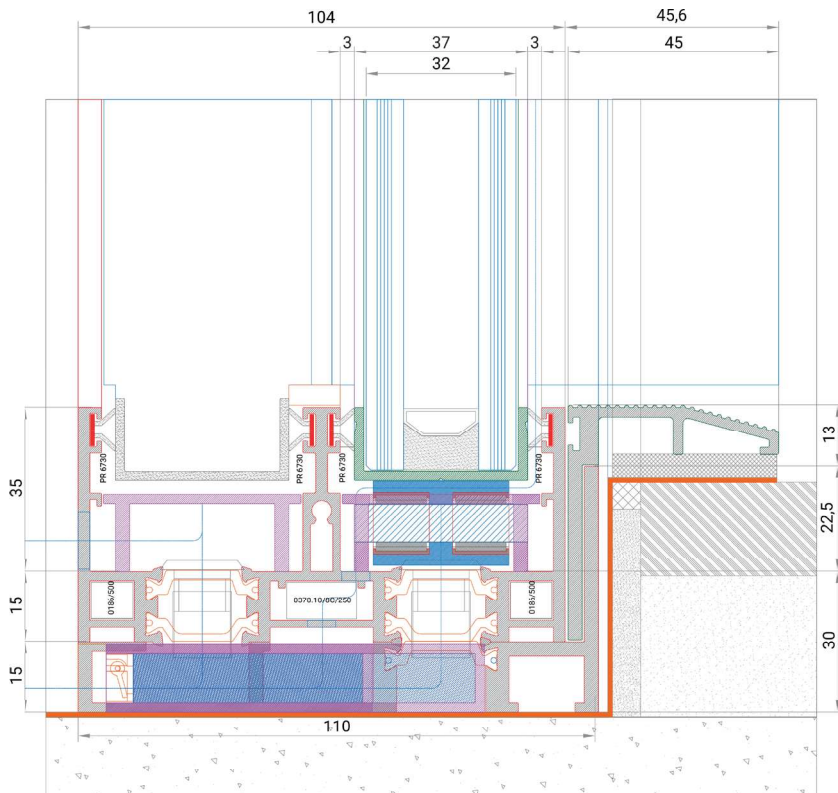

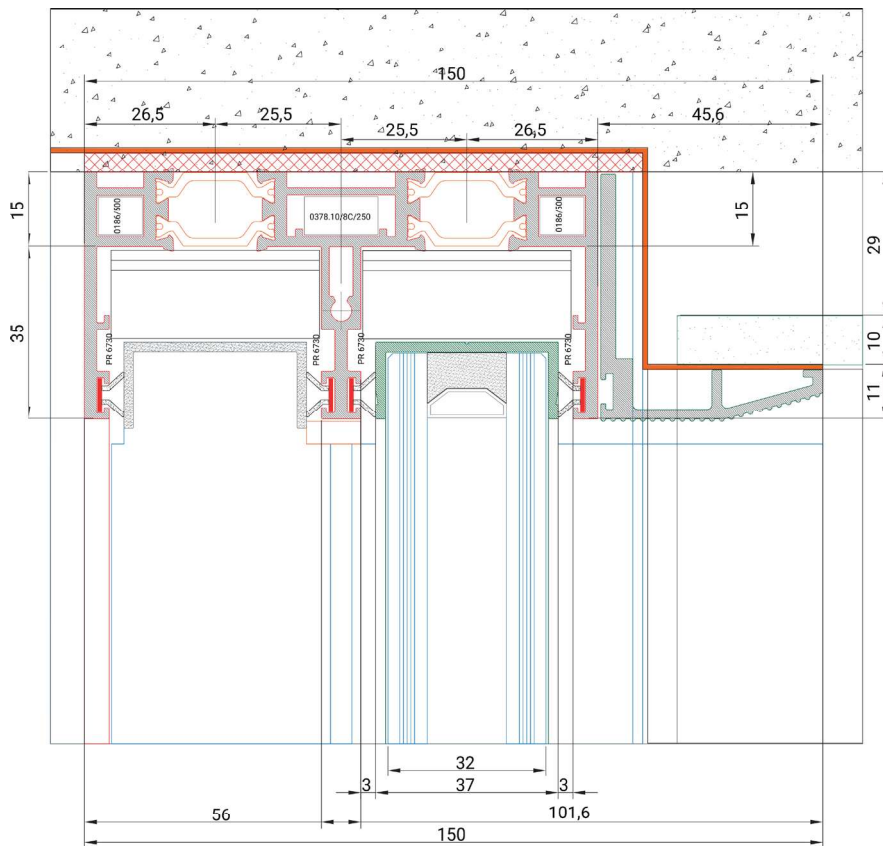

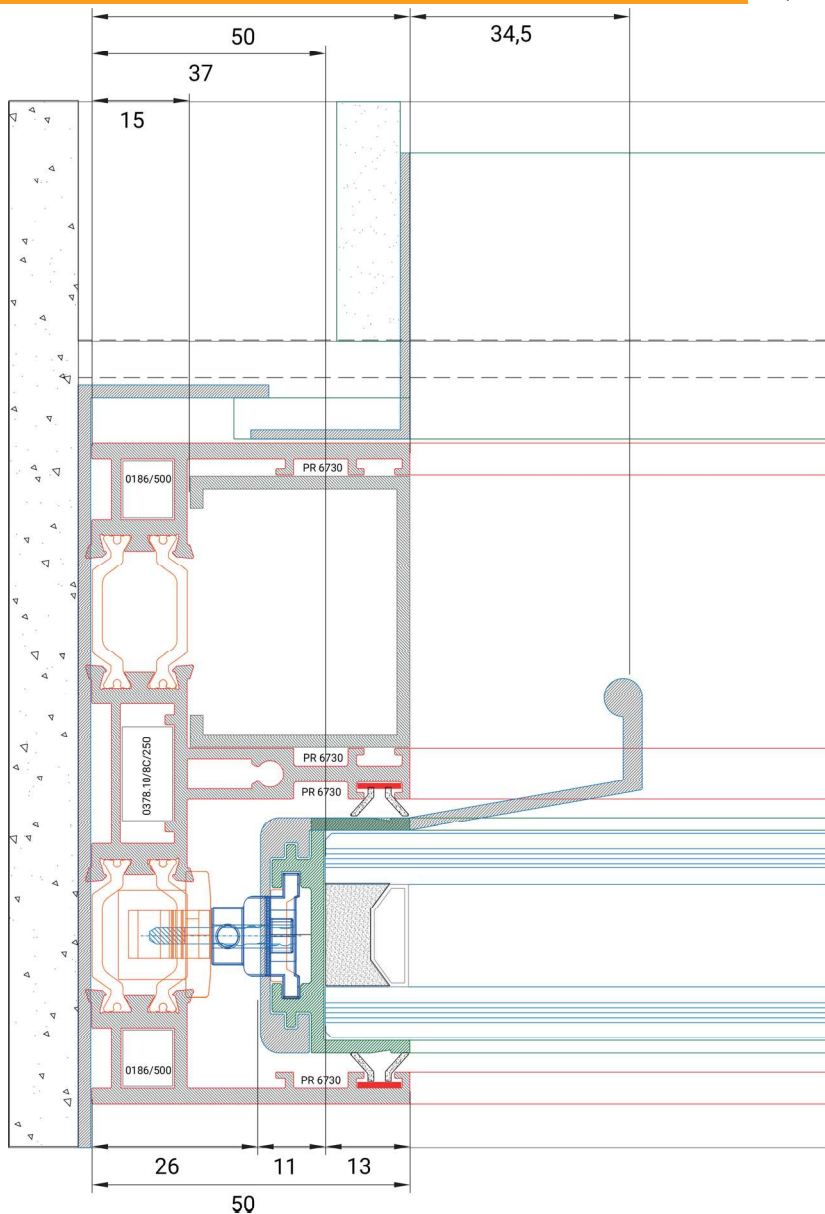

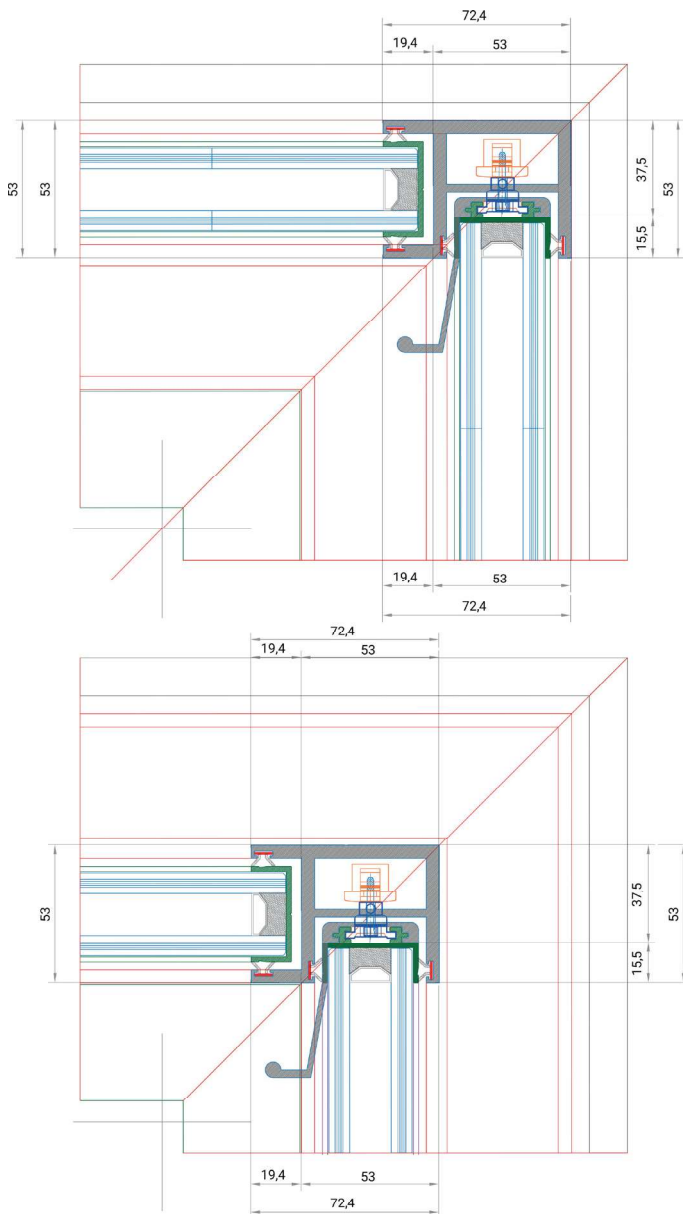

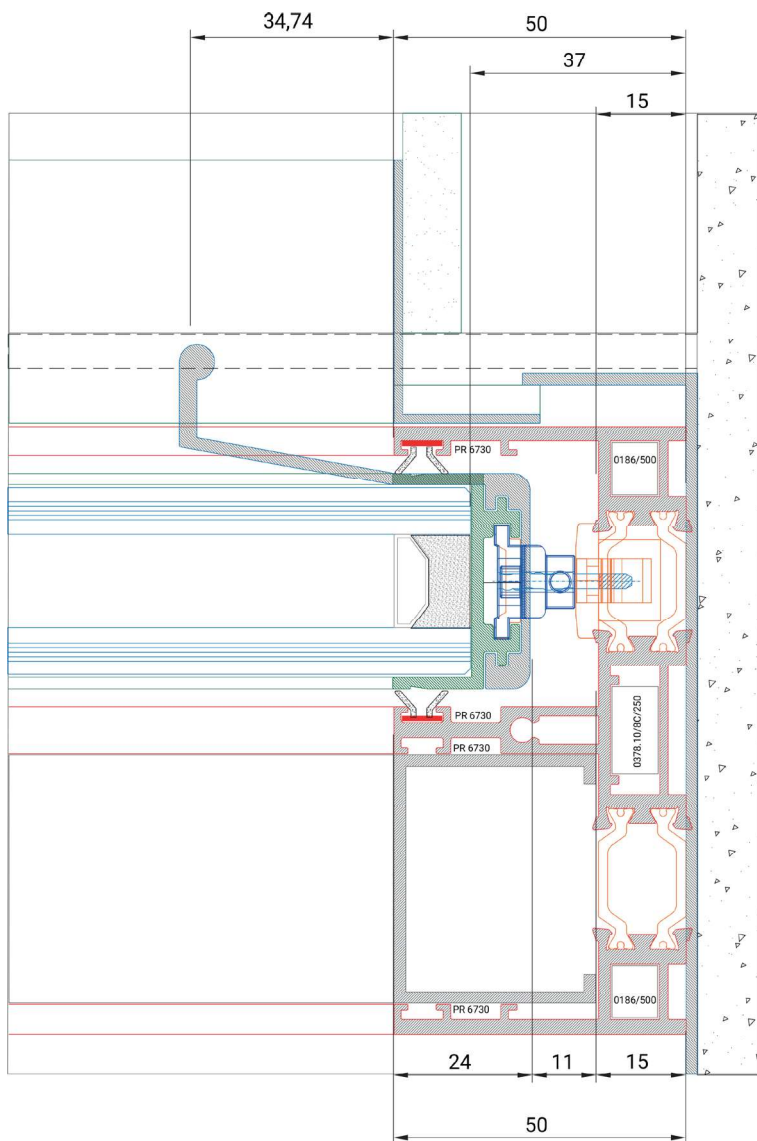



تفتخر مجموعة الفضل الدولي للخليج بشراكتها مع مصانع هوكارت، إحدى أكبر المجمّعات الصناعية المتخصصة في إنتاج الألمنيوم، والتي تمتلك خبرة تتجاوز الأربعين عامًا في هذا المجال. هذه الخبرة الطويلة مكّنتنا من تقديم منتجات عالية الجودة تُصنَّع وفق أرقى المعايير العالمية. في مجموعة الفضل، نضع الجودة والابتكار في صميم عملنا. نحن نراقب بعناية كل مرحلة من مراحل الإنتاج والتركيب لنقدّم لعملائنا حلولاً متميزة تجمع بين المتانة والتصاميم العصرية. كما نحرص على تلبية مختلف الاحتياجات، سواء في المشاريع الكبرى للبنية التحتية أو في الاستخدامات السكنية والتجارية. التزامنا يقوم على ثلاثة محاور أساسية: جودة فائقة، دوام واستمرارية، وابتكار متواصل، لنضمن لعملائنا في سلطنة عمان ومنطقة الخليج ثقة دائمة وخياراً أول لحلول الألمنيوم المتكاملة.